TACTICAL DIVISION

STREAMLIGHT®

PROFESSIONAL
ILLUMINATION TOOLS

TABLE OF CONTENTS BY PRODUCT LINE

// STINGER® AND STRION® SERIES


Stinger® 2020
pg. 6


Stinger HPL® //
Stinger DS HPL®
pg. 7


UltraStinger® LED
pg. 7


Stinger LED HL® //
Stinger DS LED HL®
pg. 8


Stinger® LED //
Stinger DS® LED
pg. 8


Stinger® Color-Rite®
pg. 9


Strion® 2020
pg. 14


Strion LED HL® //
Strion® DS HL
pg. 15


Strion® LED
pg. 16

// SL SERIES


SL-20L®
pg. 18


SL-20LP®
pg. 19

// WORK LIGHTS


Syclone®
pg. 20


BearTrap® 360
pg. 20

// PORTABLE SCENE LIGHTS AND LANTERNS


Portable Scene
Light II pg. 21


Portable Scene
Light pg. 21


The Siege®
pg. 22


Waypoint® 400
pg. 23

// TLR® SERIES


TLR-1 HL®
pg. 27


TLR-1 HL®-X
pg. 28


TLR-1® HP
pg. 29


TLR-1® HP-X
pg. 29


TLR-1® // TLR-1®s
pg. 30


TLR-2® // TLR-2®s
pg. 30


TLR-2 HL®
pg. 31


TLR-2 HL® G
pg. 31


TLR-2® G
pg. 32

NEW


TLR-3®X
pg. 32


TLR-4®
pg. 33


TLR-4® G
pg. 33


TLR-6®
pg. 34


TLR-6 HL®
pg. 35

UPGRADED


TLR-7® X
pg. 36

UPGRADED


TLR-7® X
Contour Remote
pg. 36

UPGRADED


TLR-7® HL-X
pg. 37

UPGRADED


TLR-7® HL-X sub
pg. 38



TLR-7® X sub
pg. 38



TLR-8® HL-X //
TLR-8® HL-X G
pg. 39



TLR-8® HL-X sub
pg. 39



TLR-8® HL-X G sub
pg. 40



TLR-8® X //
TLR-8® X G
pg. 41



TLR-8® X sub //
TLR-8® X G sub
pg. 42



TLR-9®
pg. 43



TLR-10®
pg. 44



TLR-10® G
pg. 44



TLR-VIR® II
pg. 45

// SPEEDLOCKER® & RECHARGEABLE BATTERIES



SpeedLocker®
pg. 47



SL-B9® Battery
Pack pg. 47



SL-B26® Battery
Pack pg. 72



SL-B50® Battery
Pack pg. 73

// TLR® RAIL MOUNT SERIES



TLR® RM 1 HL-X
pg. 48



TLR® RM 1
pg. 49



TLR® RM 2
pg. 49



TLR® RM 1 Laser
pg. 50



TLR® RM 2 Laser
pg. 50



TLR® RM 1 Laser-G
pg. 51



TLR® RM 2 Laser-G
pg. 51



TLR-1 HPL®
pg. 52

// TL-RACKER®



TL-Racker®
pg. 53

// PROTAC® RAIL MOUNT SERIES



ProTac® Rail Mount 1L-X
// ProTac® Rail Mount
1L-X Pro
pg. 56



ProTac® Rail
Mount 1
pg. 57



ProTac® Rail
Mount 2
pg. 57



ProTac® Rail
Mount HP-X Pro
pg. 58



ProTac® Rail
Mount HL-X
pg. 59



ProTac® Rail
Mount HL-X
Pro pg. 59



ProTac® 2.0
Rail Mount
pg. 60



ProTac® 2.0
Rail Mount HP
pg. 61



ProTac® Rail Mount
VIR Pro
pg. 62

// WEDGE® SERIES



Wedge®
pg. 64



Wedge® XT
pg. 64



Wedge® SL
pg. 65

// PROTAC® AND POLYTAC® SERIES



ProTac® 1L-1AA
pg. 66



ProTac® 2L-X
pg. 66



Protac® 2.0 HP
pg. 67



ProTac® 2.0
pg. 67



ProTac® 2AA-X
pg. 67



Protac® HP-X
pg. 68



ProTac® HL-X
pg. 68



ProTac HL® USB
pg. 69



ProTac HL® 6
pg. 69



ProTac® 90X
pg. 69

NEW



PolyTac® 1X
pg. 70



PolyTac® X
pg. 70

// SIDEWINDER® SERIES



Sidewinder Stalk®
pg. 74



Sidewinder®
pg. 76



Sidewinder® Rescue
pg. 76



Sidewinder Boot®
pg. 76



Sidewinder Compact® III
pg. 77



Sidewinder® X
pg. 78

// HEADLAMPS



Sledge®
pg. 80



SL-SideSaddle®
pg. 80



Enduro® Pro USB
pg. 81



Bandit® Pro
pg. 81

// STREAM™ SERIES



MegaStream® HP USB
pg. 82



MegaStream® USB
pg. 82



MicroStream® USB
pg. 83



MicroStream®
pg. 83



MacroStream® USB
pg. 83

// JR SERIES



Streamlight Jr.® LED
pg. 84

// STYLUS® SERIES



Stylus Pro®
pg. 84



Stylus®
pg. 84



Stylus Pro® USB // Stylus Pro® USB UV Series
pg. 85

// KEY CHAIN LIGHTS



Nano Light® II
pg. 86



Pocket Mate® USB
pg. 86



ClipMate® USB
pg. 86


STREAMLIGHT P/N 69300



STINGER® SERIES

STINGER® 2020

IPX7

Rechargeable, high-lumen flashlight with mode selector switch

- Dual power switches and intuitive mode selector switch (as shown below) for ease of use
- Multiple charging options; recharges in 8 hours
- Anti-roll design

	HIGH	MEDIUM	LOW
LUMENS	2,000	850	100
CANDELA	25,000	10,000	1,200
DISTANCE	315m	200m	70m
RUN TIME	2 hrs	4 hrs	24 hrs

Strobe runs 3.25 hours

2000 LUMENS





Description	Item #
Stinger 2020 - 120V AC/12V DC - 1 holder - Black	78101
Stinger 2020 - 120V AC/12V DC - 1 holder - Red	78121
Stinger 2020 - 120V AC/12V DC - 1 holder - Blue	78131
Stinger 2020 - 12V DC - 1 holder - Black	78104
Stinger 2020 - Light only - Includes “Y” USB cord - Black	78100
Stinger 2020 - Light only - Includes “Y” USB cord - Red	78120
Stinger 2020 - Light only - Includes “Y” USB cord - Blue	78130

Size and Weight	Battery
7.67” (19.48 cm); 12.3 oz (350g)	(2) SL-B26 battery packs

STINGER® HPL // STINGER DS® HPL

IPX4

Long-range flashlight produces an intense beam for illuminating objects at a distance

- Intensely bright illumination patterns
- High, medium, low and strobe modes
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	800	400	200
CANDELA	48,000	24,000	12,000
DISTANCE	438m	310m	219m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours



Description	STINGER HPL Item #	STINGER DS HPL Item #
120V AC/12V DC - 2 holders - Black	75763	75863
120V AC - Black	75761	75861
12V DC - Black	75799	75899
120V AC/12V DC PiggyBack - Black	75782	75882
Light Only - Black	75980	75900

Size and Weight	Battery
HPL: 9.23" (23.44 cm); 13.6 oz (385g) // DS HPL: 9.65" (24.51 cm); 14 oz (396g)	NiMH

ULTRASTINGER® LED

IPX4

High-lumen, full-size flashlight with superior downrange performance

- High, medium, low and strobes modes
- TEN TAP® Programmable

	HIGH	MEDIUM	LOW
LUMENS	1,100	350	90
CANDELA	65,000	21,000	5,000
DISTANCE	510m	290m	141m
RUN TIME	1.5 hrs	4.5 hrs	16 hrs

Strobe runs 3.25 hours



Description	Item #
UltraStinger LED - 120V/12V AC/DC - 2 holders - Black	77553
UltraStinger LED - 120V/12V AC/DC - Black	77551
UltraStinger LED - 12V DC - Black	77555
UltraStinger LED - Light Only - Black	77550

Size and Weight	Battery
11.82" (30 cm); 19.9 oz (564g)	NiMH

STINGER LED HL® // STINGER DS LED HL®

IPX4

High-lumen flashlight provides maximum illumination

- Wide beam pattern gives you a bright flood light
- High, medium, low and strobe modes; recharges in 4.5 hours
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	800	400	200
CANDELA	24,000	12,000	6,000
DISTANCE	310m	219m	155m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours





Description	HL	DS HL
120V AC/12V DC - 2 Holders - Black	75430	75454
120V AC - Black	75431	75455
12V DC - Black	75432	75456
120V AC/12V DC - PiggyBack - Black	75434	75458
Light Only - Black	75429	75453

Size and Weight	Battery
LED HL: 8.41" (21.36 cm); 12.4 oz (352g) // DS LED HL: 8.85" (22.48 cm); 12.8 oz (363g)	NiMH

STINGER® LED // STINGER DS® LED

IPX4

All-purpose lighting tool designed for the broadest range of lighting needs

- Recharges within 4.5 hours
- Multiple lighting modes: high, medium, low and strobe
- The DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	425	200	100
CANDELA	26,000	12,000	6,000
DISTANCE	322m	219m	155m
RUN TIME	3 hrs	5.5 hrs	10 hrs

Strobe runs 7.5 hours



Description	LED	DS LED
120V AC/12V DC - 2 Holders - Black	75713	75813
120V AC - Black	75711	75811
12V DC - Black	75712	75812
120V AC/12V DC - PiggyBack - Black	75732	75832
Light Only - Black	75710	75810

Size and Weight	Battery
LED: 8.41" (21.36 cm); 12.4 oz. (352g) // DS LED: 8.85" (22.48 cm); 12.8oz (364g)	NiMH

STINGER® COLOR-RITE®

IPX4

Rechargeable flashlight featuring Streamlight's Color-Rite Technology®

- Provides warm white light that produces a natural balance of color
- Reduced glare prevents eye fatigue and helps cut through murky atmospheres. Ideal for low-light tracking and detecting trace evidence.
- Multi-function, push button switch: high, medium, low or strobe

	HIGH	MEDIUM	LOW
LUMENS	500	275	140
CANDELA	17,500	9,000	4,500
DISTANCE	265m	190m	134m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours / Color Temperature: 3,000k

Description	Item #
Stinger Color-Rite - 120V AC/12V DC - Black	75499
Stinger Color-Rite - 120V AC/12V DC PiggyBack - Black	75502
Stinger Color-Rite - Light Only - Black	75498

Size and Weight	Battery
8.41" (21.36 cm); 12.4 oz (352g)	NiMH

Color-Rite®







STINGER® ACCESSORIES

DESCRIPTION	ITEM #	STINGER 2020	STINGER COLOR-RITE	STINGER LED HL // STINGER DS LED HL	STINGER HPL // STINGER DS HPL	STINGER LED // STINGER DS LED	ULTRASTINGER LED
5-Unit Bank Charger	75400	√	√	√	√	√	√
Smart Charger	75105	√	√	√	√	√	√
Smart PiggyBack® Charger	75277		√	√	√	√	
Li-Ion Battery Stick	75176		√	√	√	√	
NiMH Battery Stick	75375		√	√	√	√	
NiMH Battery	77375						√
SL-B26 Battery Carrier- batteries included	78105	√					
SL-B26 Battery Carrier- batteries not included	78106	√					
12V DC1 Charge Cord	22051	√	√	√	√	√	√
12V DC2 Charge Cord	22050	√	√	√	√	√	√
120V AC Charge Cord	22071	√	√	√	√	√	√
"Y" USB Cord	22082	√					
SL-B26 Battery Pack - 1pk	22101	√					
8-Unit SL-B26 Bank Charger - 120V DC	20224	√					
SL-B26 Battery Pack Charger Kit, USB (Includes (2) SL-B26 battery packs and USB cord)	22010	√					
SL-B26 Battery Pack Charger Kit, 120V AC (Includes (2) SL-B26 battery packs and USB cord)	22011	√					
Leather Plain Holster	75133			√		√	
Leather Weave Holster	78114	√					
Leather Weave Holster	75134			√		√	
Stinger 2020 Switch Kit	78115	√					
Stinger 2020 Rear Door Kit	78116	√					
Stinger 2020 Service Kit	78117	√					
Nylon Holster	75927		√			√	
Nylon Holster	75910						√
Nylon Holster	78107	√					
Loop Nylon Holster	75928		√	√	√	√	√
Duty Holster	88053		√	√	√	√	√
Ring Holder	75906		√	√	√	√	√
Facecap Ring Kit	78113	√					
Red Flip Lens	75115	√	√	√		√	
Blue Flip Lens	75116	√	√	√		√	
Green Flip Lens	75117	√	√	√		√	
IR Flip Lens	75027	√	√	√		√	
Red Wand	75903	√	√	√		√	√
Red Wand	75946				√		
White Wand	75908	√	√	√		√	
Blue Wand	75902	√	√	√		√	
Yellow Wand	75904	√	√	√		√	√
Yellow Wand	75948				√		
Glow in the Dark Wand	75913	√	√	√		√	√
Glow in the Dark Wand	75950				√		

***Images of accessories on the next page*






75176


75375


78105


22051


22050


22071


22082


75133



78114, 75134


75927, 78910, 78107


75928


88053


75906


75277


78113


75115


75116


75117


75027


75400


75908


75902


75904, 75948



75913, 75950


75903, 75946


22101


78106


78115



78116


78117


20224


22010


22011


75105


77375

// COLOR-RITE TECHNOLOGY®

// WHAT IS COLOR-RITE TECHNOLOGY?

Color-Rite Technology is based on the Color Rendering Index (CRI) -- a scale from 0-100 that indicates how a light source reflects color variations as they appear to the human eye. The higher the CRI, the more vibrant the colors appear. On the scale, lights that measure 90+ are considered “high” CRI lights and are critical for tasks requiring the most accurate color discrimination. A perfect 100 would enable us to see colors as they appear in natural sunlight.

// WHY STREAMLIGHT COLOR-RITE TECHNOLOGY?

Flashlights equipped with Streamlight’s proprietary Color-Rite Technology allow users to see the color spectrum as they would in natural light. While a standard high-lumen LED light produces an ultra-bright white beam that is needed in many applications, it prevents seeing subtle color differences in, for example, auto body paint colors or electrical wiring. In contrast, a high CRI light provides a softer, warmer beam to prevent color “washout,” allowing the user to see specific colors or imperfections and subtle details, regardless of the task.

// COLOR-RITE® APPLICATIONS FOR EVERY SITUATION

Streamlight offers a family of Color-Rite® lights for situations that require detailed inspections or color differentiation. For markets as diverse as automotive, industrial, law enforcement, military and even outdoor recreation, we have developed high CRI lights with Color-Rite Technology® for a wide variety of tasks that require exacting attention to detail. From repairing electrical wires to inspecting paint finishes or examining forensic evidence, count on Streamlight’s Color-Rite® products help get the job done efficiently and safely. Our family of Color-Rite® products include the following:



STINGER® COLOR-RITE®

Rechargeable, warm white (3,000K)
90 CRI LED with Streamlight’s Color-Rite Technology



DUALIE® 3AA COLOR-RITE®

Intrinsically safe multi-function dual beam flashlight with a cool white LED and a warm white (4,000K) 90 CRI LED with Streamlight’s Color-Rite Technology



STINGER SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light



STRION SWITCHBLADE®

Five lights in one:
Drop Light | Hands-Free | White Light |
Color-Rite Light (4,000K) | UV Light



SYCLONE®

Ultra-compact work light with a cool white LED and a warm white (4,000K) 90 CRI LED with Streamlight’s Color-Rite Technology

// A LIGHT FOR EVERY SITUATION

// COLOR-RITE® APPLICATIONS BY MARKET

LAW ENFORCEMENT/MILITARY

- **Improve tracking in low-light conditions.** High CRI lights like the Stinger Color-Rite help border patrol and other law enforcement agencies reveal subtle details of tracks and other markings that white LEDs with their bright "hot spots" can miss.
- **Detect trace evidence.** Forensic teams can more clearly spot fingerprints, fibers and other trace evidence on glass and other slick surfaces with high CRI lights such as the Stinger Color-Rite.
- **Enhance visualization.** High CRI lights can help cut through murky lake or ocean water, thick smoke or fog, and even heavy dust when pursuing vehicles in rough terrain.

AUTOMOTIVE

- **Match and identify colors.** The Dualie 3AA Color-Rite, FlipMate, Stinger Switchblade, Syclone and Strion Switchblade are ideal for color matching and identifying body imperfections before and after paint repairs.
- **Identify defects.** Paint defects such as swirl marks and color sanding scratches are easily identifiable with high CRI LEDs.
- **Distinguish colors.** When troubleshooting electrical short circuits or other motor vehicle repairs, high CRI lights assist in differentiating colored wires in hard-to-see areas under a hood or carriage.
- **Reduce glare when working in tight spaces.** Because high CRI LEDs reflect back less light than bright white LEDs, mechanics can see greater detail when working in dark, hard-to-reach places underneath a car or under the hood.



INDUSTRIAL

- **Differentiate wire colors in electrical panels.** In plants and other facilities, high CRI lights like the Dualie 3AA Color-Rite, FlipMate and Syclone provide better color contrast of intricate wires in electrical cabinets, helping technicians to work more efficiently.
- **Spot imperfections.** High CRI lights allow for contrast of color to identify imperfections in finish inspections of products, including parts.
- **Reduce eye fatigue.** The soft lighting of high CRI LEDs reduces eye strain and fatigue for many users.

FIRE/RESCUE/EMS

- When responding to fires, accidents or other events under low light conditions, high CRI area lights such as the Dualie 3AA Color-Rite, Stinger Switchblade, and Stinger Color-Rite can be essential tools, permitting first responders to **see the color spectrum as they would in natural daylight.**
- High CRI lights also allow investigators to **see specific colors, imperfections and subtle details** when examining fire or accident scenes and gathering evidence.

OUTDOOR RECREATION

- **Identify blood trails.** State-of-the-art blood trailing technology in high CRI lights, such as the Stinger Color-Rite, reduce certain colors in the spectrum to better amplify blood trails.
- **Visualize in low-light conditions.** Hikers and other outdoor enthusiasts use high CRI lights like the Dualie 3AA Color-Rite to better see obstacles when navigating trails at night and under other low-light conditions.

STREAMLIGHT

STRION® 2020

- 1,200 LUMENS
- MODE SELECT SWITCH: HIGH, MEDIUM, LOW
- RECHARGEABLE BATTERY



STREAMLIGHT.COM/STRION2020

©2024 STREAMLIGHT, INC. ALL RIGHTS RESERVED

STREAMLIGHT

STRION® 2020

IPX7

Compact, high-lumen flashlight with intuitive mode selector switch for ease of use

- Features independently functioning head and tail switches
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available

	HIGH	MEDIUM	LOW
LUMENS	1,200	460	120
CANDELA	28,000	10,000	3,000
DISTANCE	335m	200m	110m
RUN TIME	1.75 hrs	5.5 hrs	12 hrs

Strobe runs 3.5 hours

Description	Item #
Strion 2020 - 120V AC/12V DC - 1 Holder - Black	74431
Strion 2020 - 120V AC/12V DC PiggyBack - Black	74435
Strion 2020 - 12V DC - Black	74434
Strion 2020 - Light Only - Black	74430

Size and Weight	Battery
6.33" (16.1 cm); 5.7 oz (161.6g)	Lithium-ion



Battery status indicator:
Green = Charged
Red = Needs to be Charged

1200 LUMENS



STRION LED HL® // STRION® DS HL

IPX4

Rechargeable, high-lumen professional flashlight ideal for searching a large area

- Anti-roll ring included
- TEN-TAP® Programming
- Recharges in 3.5 hours
- DS model features dual switch capability

STRION LED HL	HIGH	MEDIUM	LOW
LUMENS	615	320	160
CANDELA	12,000	6,000	3,000
DISTANCE	219m	155m	110m
RUN TIME	1.25 hrs	2.5 hrs	4.5 hrs

Strobe runs 3 hours



Description	HL	DS HL
120V AC/12V DC - 2 Holders - Black	74752	74612
120V AC/12V DC - 1 Holder - Black	74751	74611
120V AC/12V DC - 1 Holder - Black - Clam	74755	74621
120V AC/12V DC PiggyBack - Black	74778	74619
120V AC - Black	74753	74613
120V AC - with Grip Ring - Black	74509	74620
12V DC - Black	74754	74614
Light Only - Black	74750	74610

Size and Weight	Battery
DS HL: 6.33” (16.08 cm); 5.4 oz (153g) // LED HL: 5.9” (14.99 cm); 5.2 oz (148g)	Lithium-ion

STRION DS HL	HIGH	MEDIUM	LOW
LUMENS	700	300	40
CANDELA	12,000	5,000	800
DISTANCE	219m	141m	57m
RUN TIME	1.25 hrs	3.5 hrs	24 hrs

Strobe runs 2.5 hours



STRION® LED

IPX4

Compact, professional light designed for the broadest range of lighting needs at the best value

- Bright, far-reaching beam with ample peripheral light with long run times
- TEN-TAP® Programming

Description	Item #
Strion LED - 120V AC/12V DC - 2 Holders - Black	74302
Strion LED - 120V AC/12V DC - 1 Holder - Black	74301
Strion LED - 120V AC/12V DC PiggyBack - Black	74353
Strion LED - 120V AC - Black	74303
Strion LED - 120V AC - with Grip Ring - Black	74309
Strion LED - 12V DC - Black	74304
Strion LED - Light Only - Black	74300

Size and Weight	Battery
5.9” (14.99 cm); 5.2 oz (148g)	Lithium-ion

	HIGH	MEDIUM	LOW
LUMENS	375	175	80
CANDELA	12,000	6,500	3,200
DISTANCE	219m	161m	113m
RUN TIME	2.5 hrs	4.75 hrs	9.5 hrs

Strobe runs 6.5 hours







STRION® ACCESSORIES

DESCRIPTION	ITEM #	STRION LED HL / STRION DS LED HL	STRION LED	STRION 2020
6-Unit Bank Charger - 120V	74400	√	√	√
6-Unit Bank Charger - 12V DC	74401	√	√	√
PiggyBack® Charger	74115	√	√	√
Charger Holder	74102	√	√	√
Lithium-ion Battery	74436	√	√	√
Li-ion Battery Stick	74175	√	√	√
12V DC1 Charge Cord	22051	√	√	√
12V DC2 Charge Cord	22050	√	√	√
120V AC Charge Cord	22071	√	√	√
Rail Mount	74200	√	√	√
Vertical Grip	69114	√	√	√
Leather Plain Holster	74059	√	√	√
Leather Weave Holster	74060	√	√	√
Nylon Holster	85905	√	√	√
Tactical Holster	88051	√	√	√
Red Flip Lens	85115	√	√	√
Green Flip Lens	85117	√	√	√
Blue Flip Lens	85116	√	√	√
Red Wand	74903	√	√	√
Yellow Wand	74904	√	√	√
Glow in the Dark Wand	74913	√	√	√


74401


74115


74102



74436


74175


22051


22050


22071


74200


69114


74059


74060


85905


88051


85115, 85117, 85116


74904


74904


74913

SL SERIES



SL-20L®

IPX4

Full size, professional grade, aluminum, rechargeable flashlight

- Tight beam for down range visibility
- Illuminated switch housing shows charge status; recharges in 9 hours
- Multi-function push-button switch

	HIGH	MEDIUM	LOW
LUMENS	450	225	60
CANDELA	70,000	35,000	9,000
DISTANCE	529m	374m	189m
RUN TIME	3.25 hrs	5 hrs	20 hrs

Strobe runs 4.5 hours

Description	Item #
SL-20L - 120V AC/12V DC - 2 sleeves - Black	20703
SL-20L - 120V AC - Black	20701
SL-20L - 12V DC - Black	20702
SL-20L - Light Only - Black	20700

Size and Weight	Battery
13.1" (33.3 cm); 1.7 lbs (770g)	NiMH



SL-20LP®

IPX4

Full size, professional grade, polymer, rechargeable flashlight

- Deep-dish parabolic reflector produces a tight beam
- Illuminated switch housing shows charge status; recharges in 4.5 hours
- Non-slip rubber comfort grip

	HIGH	MEDIUM	LOW
LUMENS	450	225	60
CANDELA	70,000	35,000	9,000
DISTANCE	529m	374m	189m
RUN TIME	3.25 hrs	5 hrs	20 hrs

Strobe runs 4.5 hours

Description	Item #
SL-20LP - 120V AC/12V DC - 2 sleeves - Yellow	25323
SL-20LP - 120V AC/12V DC - 2 sleeves - Black	25303
SL-20LP - 120V AC/12V DC - 2 sleeves - Orange	25313
SL-20LP - 120V AC - Yellow	25321
SL-20LP - 120V AC - Black	25301
SL-20LP - 120V AC - Orange	25311
SL-20LP - 12V DC - Yellow	25322
SL-20LP - 12V DC - Black	25302
SL-20LP - 12V DC - Orange	25312
SL-20LP - Light Only - Yellow	25320
SL-20LP - Light Only - Black	25300
SL-20LP - Light Only - Orange	25310

Size and Weight	Battery
13.2" (33.5 cm); 1.3 lbs (590g)	NiMH



SL-20L® / SL-20LP® ACCESSORIES

DESCRIPTION	ITEM #	SL-20L	SL-20LP
Charge Sleeve	22047	√	√
5-Unit Bank Charger 120V AC	21400	√	√
5-Unit Bank Charger 12V DC	21401	√	√
DC1 Charge Cord (Rechargeables)	22051	√	√
NiMH Battery Stick	77375	√	√
Red Wand	22511	√	√
Yellow Wand	22519	√	√
Nylon Holster	25090	√	√


22047


77375


25090


22051


22511


22519


21400, 21401



SYCLONE®

IPX4

Compact, rechargeable work light with Color-Rite Technology®



- Cool white light and 90 CRI LED - each with high, medium and low modes
- Hands-free options with the flat, magnetic base and stowable hang hook
- Head swivels 360° to aim the beam

Spot/Cool White	HIGH	MEDIUM	LOW
LUMENS	400	200	100
DISTANCE	141m	95m	72m
RUN TIME	2 hrs	4.5 hrs	9.5 hrs
Flood/90 CRI	**HIGH**	**MEDIUM**	**LOW**
LUMENS	300	150	75
DISTANCE	48m	35m	24m
RUN TIME	2 hrs	4 hrs	8 hrs

Color Temperature 4,000K

Color-Rite®

Description	Item #
Syclone - Includes USB cord - Red	61510

Size and Weight	Battery
2.97" (7.54 cm); 5.3 oz (150g)	Lithium polymer

BEARTRAP® 360

IPX4

Rechargeable work light with 360° rotating body that pivots 270°

- Produces bright white light in both spot and flood modes
- Go hands-free - clamp it or use its magnetic base
- Will continue to charge while plugged in and in use

2000 LUMENS



	SPOT			FLOOD		
	HIGH	MEDIUM	LOW	HIGH	MEDIUM	LOW
LUMENS	1,000	450	325	2,000	1,000	575
CANDELA	7,500	3,600	2,500	1,200	680	360
DISTANCE	174m	120m	100m	69m	52m	38m
RUN TIME	4.5 hrs	8.75 hrs	12.5 hrs	2.5 hrs	5 hrs	8.75 hrs

Description	Item #
BearTrap 360 - 120V/100V AC - Red	61523
120V AC Cord	44922
12V DC Cord	44923
Lithium-Ion Battery	61522

Size and Weight	Battery
7.62" (19.35 cm); 2 lbs 5 oz (1049g)	Lithium-ion



PORTABLE SCENE LIGHT II

IPX7

Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for “light tower” capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.

10000 LUMENS



	100%	80%	60%	40%	20%
LUMENS	10,000	8,300	6,300	4,500	2,300
RUN TIME	2 hrs	2.75 hrs	3.75 hrs	5.75 hrs	11 hrs

Description	Item #
Portable Scene Light II - 120V/12V DC - Red	46000

Size and Weight	Battery
16” (40.6 cm); 15.56 lbs (7.06kg)	Lithium-ion

PORTABLE SCENE LIGHT

IP67

Portable and collapsible flood light with extreme brightness

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space and rugged enough to withstand rough terrain
- Resists 40mph wind





10000 LUMENS



	HIGH	MEDIUM	LOW
LUMENS	10,000	5,300	2,000
CANDELA	95,000	49,500	22,450
DISTANCE	616m	445m	300m
RUN TIME	2 hrs	4 hrs	12 hrs

Description	Item #	COO	TAA
Portable Scene Light - 120V AC/12V DC - Yellow	45670	US	YES
Portable Scene Light EXT - 120V AC/12V DC - Yellow	45680	US	YES

Size and Weight	Battery
22.5” (57.2 cm); 25.8 lbs (11.7kg) // EXT: 25.5” (64.8 cm); 26.3 lbs (11.9kg)	Zero-maintenance, sealed lead acid; Can also be powered by 12V DC power cord



THE SIEGE®

IPX7

Compact, alkaline battery powered lantern

- Runs over 30 hours on high and over 12 days on low
- Battery indicator flashes when low battery
- Three white light settings, a red light for softer light and an SOS mode
- Ergonomic handle-incorporated D-rings to hang

WHITE	HIGH	MEDIUM	LOW
LUMENS	540	275	55
RUN TIME	30 hrs	70 hrs	295 hrs

RED	HIGH	SOS
LUMENS	10	10
RUN TIME	235 hrs	430 hrs



Description	Item #
The Siege - Coyote	44931
Glare Guard™	44950
Magnetic Base - Black	44952

Size and Weight	Battery
7.25" (18.41 cm); 1 lb 15 oz (878.83g)	(3) D Batteries

WAYPOINT® 400

IPX8

Rechargeable spotlight for long range targeting

- Far reaching beam
- Integrated stand for hands-free lighting
- Recharges in 4 hours
- Trigger-style switch, secondary mode selector switch

	HIGH	MEDIUM	LOW
LUMENS	1,400	600	38
CANDELA	400,000	165,000	10,000
DISTANCE	1,265m	812m	200m
RUN TIME	3.25 hrs	7.5 hrs	84 hrs

Description	Item #
Waypoint 400 - 120V AC - Yellow	44910
Waypoint 400 - 120V AC - Black	44911

Size and Weight	Battery
6.75” (17.15 cm); 1.52 lbs (691g)	Lithium-ion



LANTERN ACCESSORIES

DESCRIPTION	ITEM #	PORTABLE SCENE LIGHT	PORTABLE SCENE LIGHT II	WAYPOINT 400
12V DC Charge Cord (10’)	22056	√		
120V AC Charge Cord	44909			√
12V DC Charge Cord	44923			√
Power Supply	22083	√	√	
120V AC Charge Cord	22074	√	√	
Battery (Sealed Lead Acid)	45630	√		
Battery Pack (Lithium-ion)	46005		√	
Heavy Duty Shoulder Strap w/ Carabiner Lock	45677	√		
Power Storage Mount	44918			√
Red Filter	44915			√
Green Filter	44916			√


44915


44916


22056


44909


44923


44903


44918


22083


22074


45630


46005


45677

LIGHT ONLY

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS


TLR-1® HP


TLR-1® HP-X


TLR-1 HL®


TLR-1 HL®-X


TLR-1® // TLR-1®s

NEW


TLR-3®X

UPGRADED


TLR-7® X

UPGRADED


TLR-7® X Contour Remote

UPGRADED


TLR-7® HL-X USB


TLR-9®

SUBCOMPACT PISTOLS

TRIGGER GUARD & RAIL MOUNT MODELS

NEW


TLR-3®X


TLR-6® Non-Laser

UPGRADED


TLR-7® X sub

UPGRADED


TLR-7® HL-X sub

LONG GUN/AR

SHOTGUN FOREND & RAIL MOUNT MODELS


TL-Racker®


TLR® RM 1


TLR® RM 1 HL-X


TLR® RM 2

NEW


ProTac® Rail Mount 1L-X Pro


ProTac® Rail Mount 1


ProTac® Rail Mount 2


ProTac® Rail Mount HL-X


ProTac® Rail Mount HL-X Pro


ProTac® Rail Mount HP-X Pro


ProTac® 2.0 Rail Mount


ProTac® 2.0 Rail Mount HP


TLR-1® HP (Long Gun Kit)


TLR-1 HL® (Long Gun Kit)


TLR-1 HPL® (Long Gun Kit)

LIGHT/LASER COMBO

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS



TLR-2® // TLR-2®s



TLR-2® G



TLR-2 HL® // TLR-2 HL® G



TLR-4® // TLR-4® G



TLR-8® X // TLR-8® X G



TLR-8® HL-X // TLR-8® HL-X G



TLR-10® // TLR-10® G

SUBCOMPACT PISTOLS

TRIGGER GUARD & RAIL MOUNT MODELS



TLR-6®



TLR-6 HL® // TLR-6 HL® G



TLR-8® X sub // TLR-8® X G sub



TLR-8® HL-X sub // TLR-8® HL-X G sub

LONG GUN/AR

RAIL MOUNT MODELS



TLR-2® // TLR-2®s



TLR-2 HL®



TLR-2 HL® G



TLR® RM 1 Laser Red//Green



TLR® RM 2 Laser Red//Green

SPECIALTY/IR

LONG GUN/AR & FULL FRAME PISTOLS

NEW



ProTac® Rail Mount VIR Pro



TLR-VIR® II

It can be difficult to choose the right weapon-mounted light for your specific gun and application. We want to make the process easier. That's why we designed the TLR Fit Guide to make it easy for you to select the right light for your weapon.

SCAN OR CLICK THE QR CODE TO VIEW OUR TLR FIT GUIDE

Beam Patterns Explained

Choosing the best gun light means pairing the right beam with your needs. Streamlight's range of gun lights offers Traditional, High Lumen, and High Candela options, each designed with features tailored to different tactical applications. Whether you need wide area visibility, a powerful pinpoint beam, or a mix of both, Streamlight has a solution to keep you ready for any challenge.



Traditional Beam Pattern: Designed for versatile, multi-purpose use, these lights offer exceptional value across a wide range of lighting needs.

Performance Characteristics	Traditional Product	
• Optimal balance of candela and lumens - the beam pattern most people expect out of a quality flashlight • Very good all-around use, broadest range of lighting applications • Good focus and arc/periphery light • Longest regulated run times	• TLR-1® and TLR-1®s • TLR-2® and TLR-2®s • TLR-3® X • TLR-4® • TLR-6® • TLR-7® X Series	• TLR-8® X Series • TLR-9® • TLR-10® Series • ProTac® Rail Mount 1L-X Pro • ProTac® Rail Mount 1 • ProTac® Rail Mount 2 • ProTac® Rail Mount VIR Pro

High Lumen Beam Pattern: Delivers maximum brightness with a wide beam pattern, ensuring full situational awareness. Perfect for illuminating smaller spaces where intense light is essential without requiring long-range reach.

Performance Characteristics	High Lumen Product	
• High lumen beam • Maximum illumination - a broader beam pattern with a wider center spot • Shorter regulated run time • More glare/bounce back	• TLR-1 HL® • TLR-1 HL®-X • TLR-2 HL® Series • TLR-6 HL® Series	• ProTac® Rail Mount HL-X Series • ProTac® 2.0 Rail Mount

High Candela Beam Pattern: Delivers powerful, long-distance beams with high-lumen output - perfect for down-range applications requiring precision and clarity.

Performance Characteristics	High Candela Product	
• High-candela beam • Casts a wide, bright beam with a tight, focused center spot for greater down-range light • More light on your target at a distance	• TLR-1 HPL® • TLR-1® HP • TLR-7® HL-X Series • TLR-8® HL-X Series	• TLR® RM 1 Series • TLR® RM 2 Series • ProTac® 2.0 Rail Mount HP • ProTac® Rail Mount HP-X Pro

TLR-1® EVOLUTION

2006
- -First Generation
- -80 Lumens
- -Later Upgraded to 300 Lumens

2013
- -630 Lumens
- -Later Upgraded to 1,000 Lumens

2024
- -1,500 Lumens
- -Front Loaded Batteries
- -Multi-Fuel
- -Paddle Switches

2025
- -65,000 Candela
- -Original Form Factor

2025
- -77,000 Candela
- -Front Loaded Batteries
- -Multi-Fuel
- -Paddle Switches

THEN



TLR-1®



TLR-1® HL



TLR-1 HL®-X



TLR-1® HP



TLR-1® HP-X

NOW

TLR-1 HL®

WHITE LIGHT ILLUMINATOR

IPX7

Provides for maximum illumination with a wide peripheral beam pattern that lights up large areas so you can identify what is nearby

- Programmable strobe for disorienting
- Unbreakable, scratch-resistant, gasket sealed lens
- Rail clamp system
- Ambidextrous switch

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs



Description	Item #	COO	TAA
TLR-1 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90-TWO and (2) CR123A lithium batteries – Black	69260	US	YES
TLR-1 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG P320® and Beretta® 90-TWO and (2) CR123A lithium batteries – Flat Dark Earth	69266	US	YES
TLR-1 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG P320® and Beretta® 90-TWO and (2) CR123A lithium batteries – Flat Dark Earth Brown	69267	US	YES
TLR-1 HL - Long Gun Kit - Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A lithium batteries - Box – Black	69262	US	YES
TLR-1 HL - Long Gun Kit Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A lithium batteries – Flat Dark Earth	69888	US	YES
TLR-1 HL - Dual Remote Kit Includes dual remote pressure switch, "safe off" door switch, mounting clips and (2) CR123A lithium batteries – Black	69889	US	YES


TLR-1 HL Long Gun Kit


TLR-1 HL Dual Remote Kit

Size and Weight	Battery
3.39" (8.61 cm); 4.32 oz (122.5g)	(2) CR123A lithium



TLR-1 HL®-X

WHITE LIGHT ILLUMINATOR

IPX7

Multi-fuel, high-lumen, rail-mounted light with front-loading batteries

- Wide peripheral beam pattern gives you a powerful 1,500 lumen light
- Standard and extended switches to suit your shooting style
- Rapid battery replacement without removing the light from your firearm (as shown below)
- SL-B9 battery pack recharges in 2.5 hours



	SL-B9	CR123A
LUMENS	1,500	1,000
CANDELA	20,000	15,000
DISTANCE	283m	245m
RUN TIME	1 hr	1.5 hrs

1500 LUMENS



Description	Item #	COO	TAA
TLR-1 HL-X - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, Sig P320 and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69500	US	YES
TLR-1 HL-X USB - Includes Rail Locating Keys, (2) SL-B9 battery packs and USB-C cord - Black	69501	US	YES

Size and Weight	Battery
3.45" (8.76 cm); SL-B9: 5.19 oz (147g) // CR123A: 4.94 oz (140g)	(2) SL-B9 battery packs or (2) CR123A lithium

TLR-1® HP

WHITE LIGHT ILLUMINATOR

IPX7

Lightweight, compact, high-candela lithium battery powered gun-mounted tactical light

- Versatile design allows for seamless transitions between firearms
- Ambidextrous momentary/steady On-Off switch
- Easy battery replacement

65,000 cd

LUMENS	1,000
CANDELA	65,000
DISTANCE	510m
RUN TIME	1.75 hrs



Description	Item #
TLR-1 HP - Includes Rail Locating Keys and (2) CR123A batteries - Black	59150
TLR-1 HP - Includes Rail Locating Keys and (2) CR123A batteries - FDE	59151
TLR-1 HP Long Gun Kit - Includes Safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A lithium batteries - Black	59152



Size and Weight	Battery
3.39" (8.61 cm); 4.32 oz (122.5g)	(2) CR123A lithium

TLR-1® HP-X

WHITE LIGHT ILLUMINATOR

IPX7

Multi-fuel, high-candela, rail-mounted light with front loading batteries

- Custom reflector produces a concentrated beam with optimum peripheral illumination
- Optimized electronics provide regulated intensity
- Extended high and high rear paddle switches to suit your shooting style
- Rapid battery replacement without removing the light from your firearm (as shown below)
- SL-B9 battery pack recharges in 2.5 hours

77,000 cd



	SL-B9	CR123A
LUMENS	1,300	1,000
CANDELA	77,000	53,000
DISTANCE	555m	460m
RUN TIME	1 hr	1.5 hrs



Description	Item #
TLR-1 HP-X - Includes Rail Locating Keys and (2) CR123A lithium batteries – Black	69167
TLR-1 HP-X USB - Includes Rail Locating Keys, (2) SL-B9 battery packs and USB-C cord – Black	69168

Size and Weight	Battery
3.7" (9.4 cm); SL-B9: 5.43 oz (154g) // CR123A: 5.2 oz (148g)	(2) SL-B9 battery packs or (2) CR123A lithium

TLR-1® // TLR-1®s

IPX7

WHITE LIGHT ILLUMINATOR

Durable gun light that produces a concentrated beam with optimum peripheral illumination

- Available in standard or strobe models
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picatinny) rails

LUMENS	300
CANDELA	12,000
DISTANCE	219m
RUN TIME	2.5 hrs



Description	Item #	COO	TAA
TLR-1 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69110	US	YES
TLR-1s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69210	US	YES

Size and Weight	Battery
3.39" (8.61 cm); 4.18 oz (118.6g)	(2) CR123A lithium



TLR-2® // TLR-2®s

IPX4

WHITE LIGHT ILLUMINATOR / RED LASER

Durable gun light with integrated red laser securely fits a broad range of weapons

- Wide peripheral beam and a 650-660nm red laser
- Mounts directly to handguns with GLOCK® style rails and to all MIL-STD-1913 (Picatinny) rails

LUMENS	300
CANDELA	12,000
DISTANCE	219m
RUN TIME	2.5 hrs

Laser mode runs 48 hours





Description	Item #	COO	TAA
TLR-2 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/ TSW, Sig P320® and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69120	US	YES
TLR-2s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/ TSW, Sig P320® and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69230	US	YES

Size and Weight	Battery
3.39" (8.61 cm); 4.72 oz (133.8g)	(2) CR123A lithium

TLR-2 HL®

WHITE LIGHT ILLUMINATOR / **RED LASER**

IPX4

High-lumen, wide peripheral beam gun light with 640-660nm red aiming laser

- User programmable strobe
- Rail grip clamp system securely attaches/detaches quickly and safely with no tools and without putting your hands in front of the muzzle
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation/replacement

1000 LUMENS



LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs

Laser mode runs 45 hours

Description	Item #	COO	TAA
TLR-2 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99 TSW, SIG P320 and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69261	US	YES

Size and Weight	Battery
3.39" (8.61 cm); 4.88 oz (138.4g)	(2) CR123A lithium

TLR-2 HL® G

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

High-lumen, wide peripheral beam gun light with 510-530nm green aiming laser

- User programmable strobe
- Rail grip clamp system securely attaches/detaches quickly and safely with no tools and without putting your hands in front of the muzzle
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation/replacement

1000 LUMENS



LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME Laser Combo	1.25 hrs
RUN TIME LED Only	1.5 hrs

Laser mode runs 17 hours

Description	Item #	COO	TAA
TLR-2 HL G - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, Smith & Wesson® 99/TSW, SIG SAUER P320® and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69265	US	YES

Size and Weight	Battery
3.39" (8.61 cm); 4.88 oz (138.4g)	(2) CR123A lithium

TLR-2® G

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

Durable gun light with integrated green laser that can be seen even in daylight

- Highly visible beam featuring a 510-530nm green laser
- User programmable strobe
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picatinny) rails

LUMENS	300
CANDELA	12,000
DISTANCE	283m
RUN TIME	2.5 hrs

Laser mode runs 17 hours

Description	Item #	COO	TAA
TLR-2 G - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99 TSW, SIG P320® and Beretta® 90-TWO and (2) CR123A lithium batteries - Black	69250	US	YES

Size and Weight	Battery
3.39" (8.61 cm); 4.72 oz (133.8g)	(2) CR123A lithium



NEW

TLR-3®X

WHITE LIGHT ILLUMINATOR

IPX7

Polymer gun light designed for sub-compact and compact weapons

- Impact and chemical-resistant, heat-stabilized polymer construction
- Reversible jaws for compatibility across compact/sub compact pistols
- One-handed snap on tighten interface keeps hands away from muzzle when attaching and detaching

LUMENS	500
CANDELA	6,500
DISTANCE	161m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Description	Item #	COO	TAA
TLR-3X (1913 Slim) - Includes mounting kit with key, paddles, multi-tool and (1) CR123A lithium battery	59102	US	YES
TLR-3X (SIG SAUER® P365®/XL closed rail systems) - Includes mounting kit with key, paddles, multi-tool and (1) CR123A lithium battery	59104	US	YES
TLR-3X (1913) - Includes mounting kit with keys, paddles, multi-tool, and (1) CR123A lithium battery	59100	US	YES
TLR-3X USB (1913 Slim) - Includes mounting kit with key, paddles, multi-tool, and (1) SL-B9 battery pack	59103	US	YES
TLR-3X USB (SIG SAUER® P365®/XL closed rail systems) - Includes mounting kit with key, paddles, multi-tool, and (1) SL-B9 battery pack	59105	US	YES
TLR-3X USB (1913) - Includes mounting kit with keys, paddles, multi-tool, and (1) SL-B9 battery pack	59101	US	YES

Size and Weight	Battery
2.75" (6.99 cm); SL-B9: 2.25" (63.8g) // CR123A: 2.15 oz (60.9g)	(1) SL-B9 battery pack or (1) CR123A lithium battery





TLR-4®

IPX4

WHITE LIGHT ILLUMINATOR / **RED LASER**

Compact, rail-mounted light with integrated 640-660nm red laser

- Ambidextrous momentary/constant on operation
- Models also available for H&K USP compact frame and H&K USP full size frame
- Durable, lightweight polymer construction

LUMENS	170
CANDELA	3,300
DISTANCE	115m
RUN TIME	1.5 hrs

Laser mode runs 15 hours



Description	Item #	COO	TAA
TLR-4 - Includes Rail Locating Keys and (1) CR2 lithium battery - Black	69240	US	YES
TLR-4 - H&K USP Compact - Includes (1) CR2 lithium battery - Black	69241	US	YES
TLR-4 - H&K USP Full-Size - Includes (1) CR2 lithium battery - Black	69242	US	YES

Size and Weight	Battery
2.73" (6.93 cm); 2.81 oz (79.7g)	(1) CR2 lithium

TLR-4® G

IPX4

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

Designed for subcompact and compact weapons, this rail-mounted light features an integrated 510-530nm green laser for high visibility long-range targeting, even in daylight

- Ambidextrous momentary/constant on operation
- Models also available for H&K USP compact frame and H&K USP full size frame
- Durable polymer construction

LUMENS	160
CANDELA	3,200
DISTANCE	113m
RUN TIME LED	1.75 hrs
RUN TIME LED+ LASER	1.25 hrs

Laser mode runs 4 hours



Description	Item #	COO	TAA
TLR-4 G - Includes Rail Locating Keys for use with Picatinny or GLOCK® style rails and (1) CR2 lithium battery - Black	69245	US	YES
TLR-4 G H&K USP Compact - Includes (1) CR2 lithium battery - Black	69246	US	YES
TLR-4 G H&K USP Full-Size - Includes (1) CR2 lithium battery - Black	69247	US	YES

Size and Weight	Battery
2.73" (6.93 cm); 2.81 oz (79.7g)	(1) CR2 lithium



TLR-6®

IPX4

WHITE LIGHT ILLUMINATOR / **RED LASER**

Designed to securely attach to a variety of subcompact handguns; features 640-660nm red laser

- Tool-less battery replacement without removal from the weapon or the need to re-sight the laser
- Ambidextrous push-button switches on either side for easy operation
- Models available without laser

LUMENS	100
CANDELA	2,000
DISTANCE	89m
RUN TIME	1 hr

Laser mode run 11 hours



Description	Item #	COO	TAA
TLR-6 (GLOCK® 42/43) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69270	US	YES
TLR-6 (GLOCK® 26/27/33) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69272	US	YES
TLR-6 Universal Kit* – Includes LED/Laser module and select TLR-6 body housings – Black	69277	US	YES
TLR-6 (M&P® Shield™ 40/9) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries – Black	69273	US	YES
TLR-6 (GLOCK® 42/43) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries – Flat Dark Earth Brown	69278	US	YES
TLR-6 (SIG SAUER® P365) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69284	US	YES
TLR-6 (GLOCK® 43X/48) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69286	US	YES
TLR-6 (SA XD Hellcat®) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69287	US	YES
TLR-6 (Taurus GX4™) White LED and Red Laser - Includes (2) CR 1/3N lithium batteries – Black	69288	US	YES
TLR-6 (GLOCK® 17/19/21) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69290	US	YES
TLR-6 (SA XD®) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69291	US	YES
TLR-6 (Smith & Wesson M&P™) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69293	US	YES
NON-LASER MODELS			
TLR-6 (GLOCK® 42/43) Without Laser – White LED - Includes (2) CR 1/3N lithium batteries - Black	69280	US	YES
TLR-6 (GLOCK® 26/27/33) Without Laser – White LED - Includes (2) CR 1/3N lithium batteries - Black	69282	US	YES
TLR-6 (M&P® Shield™) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black	69283	US	YES
TLR-6 (SIG SAUER® P365®) Without Laser – White LED – Includes (2) CR 1/3N lithium batteries – Black	69285	US	YES

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER®, Springfield Armory®, KIMBER®, Colt®, Ruger®, & KAHR® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER, Springfield Inc., Colt, Ruger, KIMBER, IP LLC & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®, Springfield Inc., SIG SAUER®, KIMBER®, KAHR® Arms or Saeilo Enterprises, Inc.

*Universal Kit includes one LED/laser Aiming module and the following shells: GLOCK 42, GLOCK 26, M&P Shield, KAHR ARMS, SIG SAUER, KIMBER Micro. (Flat Dark Earth, Rail Mount, 1911 & Non Laser models not included.)

Size and Weight	Battery
2.30" (5.84 cm); 1.27 oz (36g) *SIZE & WEIGHT VARY BY MODEL*	(2) CR-1/3 N Lithium

TLR-6 HL®

WHITE LIGHT ILLUMINATOR / RED LASER OR GREEN LASER

IPX4

Weapon light features a high-power LED with red or green laser and a rechargeable battery system with portable charge case that allows for convenient storage and charging without the need to tether to your gun

- Designed to securely attach to multiple variations of weapons
- Includes three easy-to-swap batteries to triple your run time
- TLR-6 HL features 640-660nm red laser; TLR-6 HL G features 510-530nm green laser



LUMENS	300
CANDELA	4,250
DISTANCE	130m
RUN TIME	20 min


Red laser runs 9 hours
Green laser runs 5 hours

Description	Item #	COO	TAA
TLR-6 HL (GLOCK® 42/43) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69340	US	YES
TLR-6 HL (GLOCK® 42/43) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth	69341	US	YES
TLR-6 HL (M&P® Shield™ 40/9) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69342	US	YES
TLR-6 HL (GLOCK® Rail Mount) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69343	US	YES
TLR-6 HL (SIG SAUER® P365/XL) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69344	US	YES
TLR-6 HL (GLOCK® 43X/48) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69345	US	YES
TLR-6 HL G (GLOCK® 42/43) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69350	US	YES
TLR-6 HL G (GLOCK® 42/43) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth	69351	US	YES
TLR-6 HL G (M&P® Shield™ 40/9) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69352	US	YES
TLR-6 HL G (GLOCK® Rail Mount) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69353	US	YES
TLR-6 HL G (SIG SAUER® P365/XL) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69354	US	YES
TLR-6 HL G (GLOCK® 43X/48) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69355	US	YES

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER®, & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®

Size and Weight	Battery
2.5" (6.35 cm); 1.12 oz (31.8g) *SIZE & WEIGHT VARY BY MODEL*	(1) SL-B2 battery

SL-B2® charging case
Charges batteries using USB-C cord
Features charge status indicator





UPGRADED

TLR-7® X

WHITE LIGHT ILLUMINATOR

IPX7

Multi-fuel, low-profile, rail-mounted light

- Accepts either SL-B9 or CR123A batteries
- SL-B9 battery pack charges in 2.5 hours
- User-interchangeable paddle switches to accommodate your shooting style
- Front loading batteries

	SL-B9	CR123A
LUMENS	725	550
CANDELA	9,500	7,200
DISTANCE	195m	170m
RUN TIME	1 hr	1.5 hrs

Description	Item #	COO	TAA
TLR-7 X - Includes low switch, high switch, (1) CR123A lithium battery and key kit - Black	69424	US	YES
TLR-7 X - Includes low switch, high switch, (1) CR123A lithium battery and key kit - FDE	69429	US	YES
TLR-7 X USB - Includes key kit, high/low paddle switches, (1) SL-B9 rechargeable battery pack and USB-C cord - Black	69455	US	YES
TLR-7 X USB - Includes key kit, high/low paddle switches, (1) SL-B9 rechargeable battery pack and USB-C cord - FDE	69456	US	YES

Size and Weight	Battery
2.58" (6.55 cm); SL-B9: 2.64 oz (74.8g) // CR123A: 2.48 oz (70.3g)	(1) SL-B9 battery pack or (1) CR123A lithium battery



Safe Off feature prevents accidental activation; saves batteries

UPGRADED

TLR-7® X CONTOUR REMOTE

WHITE LIGHT ILLUMINATOR

IPX7

Designed for one-handed shooting – ideal for dog handlers, SWAT teams, door breaching and close-quarter operations

- Rail grip clamp system securely attaches/detaches quickly and safely with no tools and without putting your hands in front of muzzle
- Ambidextrous rear on/off switch; pressure-controlled grip switch provides momentary operation
- Front loading batteries
- Cannot be retrofitted with existing TLR-7 X products

	SL-B9	CR123A
LUMENS	725	550
CANDELA	9,500	7,200
DISTANCE	195m	170m
RUN TIME	1 hr	1.5 hrs

Description	Item #	COO	TAA
TLR-7 X Contour Remote - for GLOCK® GEN 4 or GEN 5 models - Includes mounting key and (1) CR123A battery - Black	69428	US	YES
TLR-7 X Contour Remote - for SIG SAUER® P320® XCARRY frame - Includes Rail Locating Keys and (1) CR123A battery - Black	69480	US	YES

Size and Weight	Battery
4.6" (11.68 cm); SL-B9: 2.85 oz (80.7g) // CR123A: 2.69 oz (76.3g)	(1) CR123A lithium battery (included) or (1) SL-B9 battery pack



Safe Off feature prevents accidental activation; saves batteries



UPGRADED

TLR-7® HL-X

IPX7

WHITE LIGHT ILLUMINATOR

High candela, multi-fuel, rail-mounted light accepts either SL-B9® rechargeable battery pack or CR123A lithium battery

- Facecap engineered to produce a longer reaching, tighter beam
- Includes interchangeable paddle switches to accommodate your shooting style
- User-programmable output modes
- Front loading batteries

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,100	550	550
CANDELA	23,000	11,000	11,000
DISTANCE	303m	210m	210m
RUN TIME	30 min	1 hr	1.5 hrs



Safe Off feature prevents accidental activation; saves batteries

Description	Item #	COO	TAA
TLR-7 HL-X USB – Includes high and low paddle switches, Rail Locating Keys, (1) SL-B9 battery pack, and USB-C cord - Black	69458	US	YES
TLR-7 HL-X USB – Includes high and low paddle switches, Rail Locating Keys, (1) SL-B9 battery pack, and USB-C cord - FDE	69459	US	YES

Size and Weight	Battery
2.9" (7.37 cm); SL-B9: 2.88 oz (81.6g) // CR123A: 2.8 oz (79.4g)	(1) SL-B9 battery pack or CR123A lithium battery

UPGRADED

TLR-7® HL-X SUB

WHITE LIGHT ILLUMINATOR

IPX7

Designed for subcompact handguns, this multi-fuel rail-mounted light accepts either an SL-B9® rechargeable battery pack or a CR123A lithium battery

- Features a specialized clamp system
- Interchangeable paddle switches accommodate your shooting style
- Front loading batteries

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	550	550
CANDELA	13,000	7,300	7,300
DISTANCE	228m	171m	171m
RUN TIME	30 min	1 hr	1.5 hrs



1000 LUMENS

Safe Off feature prevents accidental activation; saves batteries

Description	Item #	COO	TAA
TLR-7 HL-X sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black	69503	US	YES
TLR-7 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO	69504	US	YES
TLR-7 HL-X sub USB (1913) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black	69505	US	YES
TLR-7 HL-X sub USB (1913OS) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black	69506	US	YES

Size and Weight	Battery
2.51" (6.38 cm); SL-B9: 2.49 oz (70.6g) // CR123A: 2.39 oz (67.8g)	(1) SL-B9 battery or (1) CR123A lithium battery

UPGRADED

TLR-7® X SUB

WHITE LIGHT ILLUMINATOR

IPX7

Ultra-compact, lightweight gun light

- Fits on select railed subcompact pistols
- Interchangeable paddle switches accommodate your shooting style
- Front loading batteries

	SL-B9	CR123A
LUMENS	725	550
CANDELA	7,700	5,000
DISTANCE	176m	141m
RUN TIME	1 hr	1.5 hrs



Safe Off feature prevents accidental activation; saves batteries



Interchangeable paddle switches easy to swap out with multi-tool (included)

Description	Item #	COO	TAA
TLR-7 X sub (GLOCK® 43X/48 MOS | 43X/48 Rail Models Only) - Includes mounting kit with key and (1) CR123A lithium battery - Black	69400	US	YES
TLR-7 X sub (SIG SAUER® P365/XL Closed Rail System) - Includes mounting kit with key and (1) CR123A lithium battery - Black	69401	US	YES
TLR-7 X sub (1913) - Includes mounting kit with key and (1) CR123A lithium battery - Black	69402	US	YES
TLR-7 X sub (1913OS) - Includes mounting kit with keys and (1) CR123A lithium battery - Black	69404	US	YES
TLR-7 X sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail Models Only) - Includes mounting kit with key and (1) SL-B9 battery pack - Black	69405	US	YES
TLR-7 X sub USB (SIG SAUER® P365/XL Closed Rail System) - Includes mounting kit with key and (1) SL-B9 battery pack - Black	69406	US	YES
TLR-7 X sub USB (1913) - Includes mounting kit with key and (1) SL-B9 battery pack - Black	69407	US	YES
TLR-7 X sub USB (1913OS) - Includes mounting kit with keys and (1) SL-B9 battery pack - Black	69408	US	YES

Size and Weight	Battery
2.51" (6.38 cm); CR123A: 2.39 oz (67.8g) // SL-B9: 2.64 oz (74.8g)	(1) CR123A lithium or (1) SL-B9 battery pack

TLR-8® HL-X // TLR-8® HL-X G

IPX4

WHITE LIGHT ILLUMINATOR / RED LASER / GREEN LASER

High-candela, multi-fuel, rail-mounted gun light with red or green laser

- Facecap engineered to produce a longer reaching, tighter beam
- 640-660nm red laser or 510-530nm green laser
- Interchangeable rear paddle switches accommodate your shooting style
- User-programmable output modes
- Front loading batteries

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	500	500
CANDELA	22,000	11,000	11,000
DISTANCE	297m	210m	210m
RUN TIME	30 min	1 hr	1.5 hrs

Red laser runs 29 hours / Green laser runs 10 hours

Description	Item #	COO	TAA
TLR-8 HL-X USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69465	US	YES
TLR-8 HL-X G USB – Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69475	US	YES

22,000 cd



Safe Off feature prevents accidental activation; saves batteries

Size and Weight	Battery
2.9" (7.37 cm); SL-B9: 3.14 oz (89g) // CR123A: 3.04 oz (86.2g)	(1) SL-B9 battery pack or (1) CR123A lithium battery



TLR-8® HL-X SUB

IPX4

WHITE LIGHT ILLUMINATOR / RED LASER

Versatile high-lumen, multi-fuel weapon light with red laser for subcompact railed handguns

- Features a specialized clamp system
- Interchangeable rear paddle switches accommodate your shooting style
- Front loading batteries

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	500	500
CANDELA	10,000	5,000	5,000
DISTANCE	200m	141m	141m
RUN TIME	30 min	1 hr	1.5 hrs

Laser mode run 29 hours

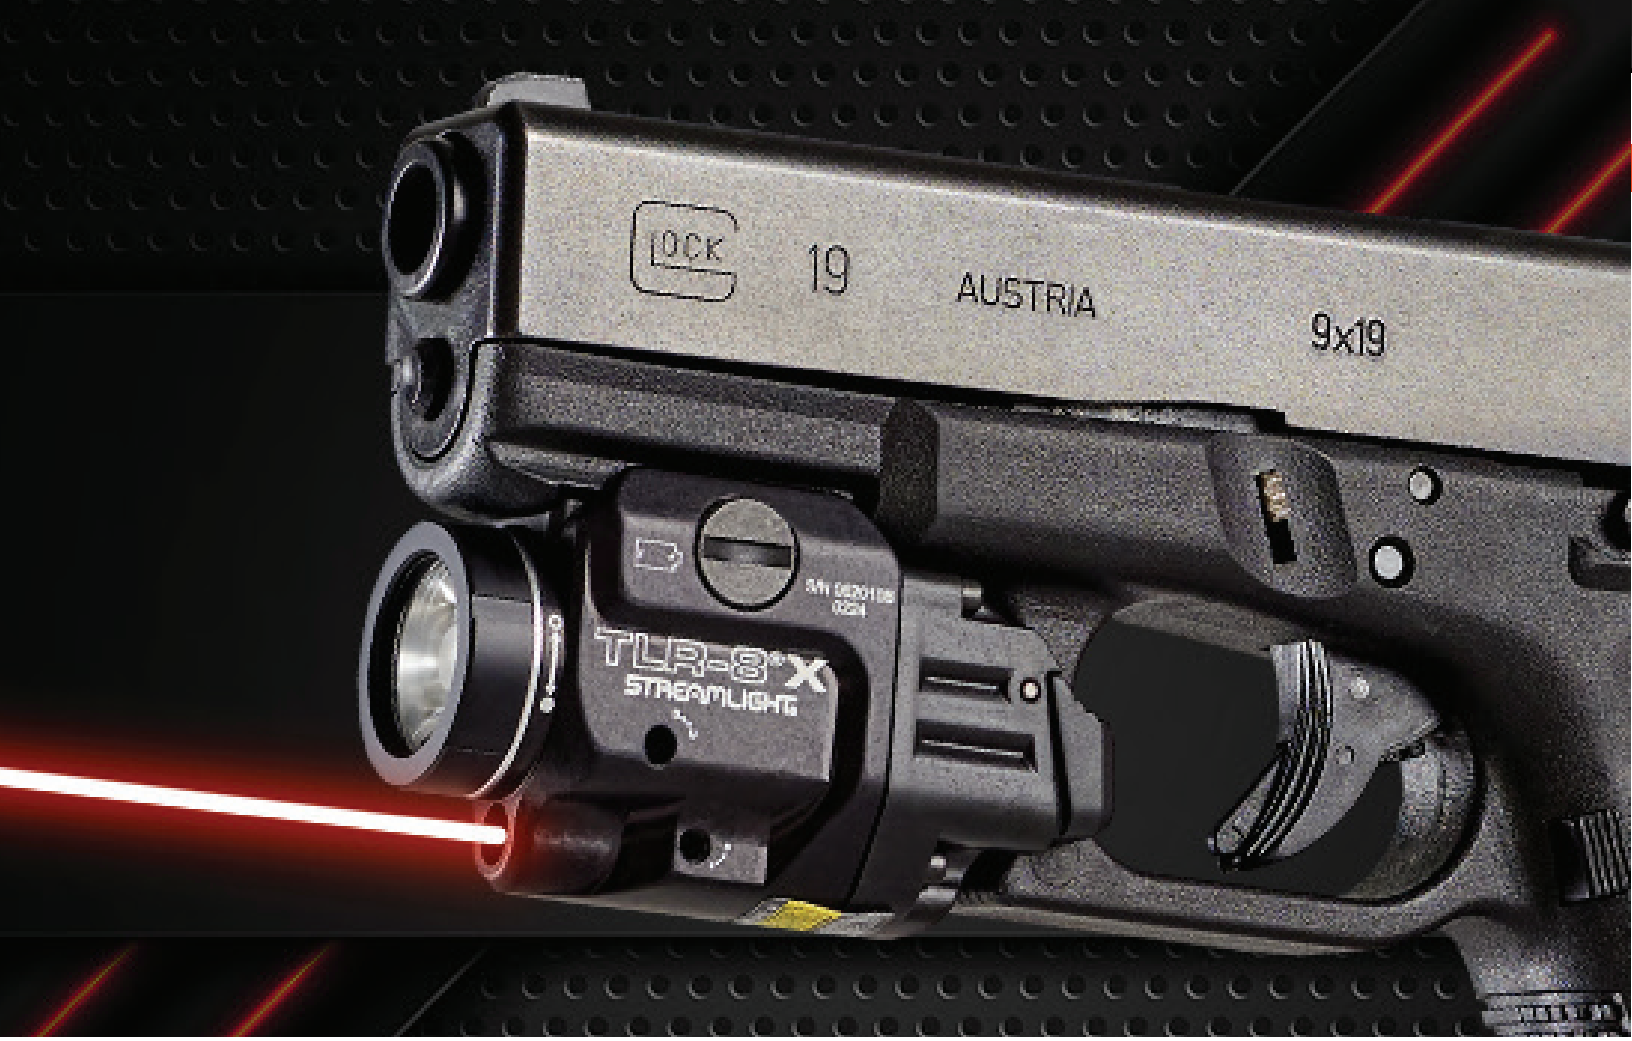
Description	Item #	COO	TAA
TLR-8 HL-X sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69466	US	YES
TLR-8 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO	69467	US	YES
TLR-8 HL-X sub USB (1913) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord- Black	69468	US	YES
TLR-8 HL-X sub USB (1913OS) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69469	US	YES

Size and Weight	Battery
2.51" (6.38 cm); SL-B9: 2.87 oz. (81.4g) // CR123A: 2.77 oz. (78.5g)	(1) SL-B9 battery pack or (1) CR123A lithium battery

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries



TLR-8® HL-X G SUB

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

High-lumen, multi-fuel, rail-mounted gun light engineered to produce a longer, reaching beam featuring a green laser

- Features a specialized clamp system
- Interchangeable rear paddle s witches accommodate your shooting style
- Front loading batteries

Description	Item #
TLR-8 HL-X G sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69476
TLR-8 HL-X G sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 battery pack and USB-C cord - Black *Does not fit the P365® XMACRO	69477
TLR-8 HL-X G sub USB (1913) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69478
TLR-8 HL-X G sub USB (1913OS) - Includes mounting kit with key, multi-tool, (1) SL-B9 battery pack and USB-C cord - Black	69479

Size and Weight	Battery
2.51" (6.38 cm); SL-B9: 2.87 oz. (81.4g) // CR123A: 2.77 oz. (78.5g)	(1) SL-B9 battery pack or (1) CR123A lithium battery

	SL-B9 DEFAULT	SL-B9 PROGRAMMABLE	CR123A
LUMENS	1,000	500	500
CANDELA	10,000	5,000	5,000
DISTANCE	200m	141m	141m
RUN TIME	30 min	1 hr	1.5 hrs

Laser mode run 10 hours

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries

TLR-8® X

WHITE LIGHT ILLUMINATOR / **RED LASER**

IPX4

Multi-fuel gun light with 640-660nm red laser designed to fit a variety of full-size and compact railed handguns

- Accepts either CR123A lithium or SL-B9 USB rechargeable battery pack
- Interchangeable paddle switches accommodate your shooting style
- Front loading batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 60 hours



Safe Off feature prevents accidental activation; saves batteries

Description	Item #	COO	TAA
TLR-8 X – Includes high switch mounted on light plus low switch in package, (1) CR123A battery and key kit - Black	69414	US	YES

Size and Weight	Battery
2.58"(6.55 cm); CR123A: 2.64 oz (74.8g) // SL-B9: 2.74 oz (77.7g)	(1) SL-B9 battery pack or (1) CR123A lithium



Interchangeable paddle switches easy to swap out with multi-tool (included)

TLR-8® X G

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

Multi-fuel gun light with 510-530nm green laser designed to fit a variety of full-size and compact railed handguns

- Accepts either CR123A lithium or SL-B9 USB rechargeable battery pack
- Interchangeable paddle switches accommodate your shooting style
- Front loading batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 11 hours



Safe Off feature prevents accidental activation; saves batteries

Description	Item #	COO	TAA
TLR-8 X G – Includes high switch mounted on light plus low switch in package, (1) CR123A battery and key kit - Black	69434	US	YES

Size and Weight	Battery
2.58" (6.55 cm); CR123A: 2.64 oz (74.8g) // SL-B9: 2.74 oz (77.7g)	(1) SL-B9 battery pack or (1) CR123A lithium



Interchangeable paddle switches easy to swap out with multi-tool (included)

TLR-8® X SUB

IPX4

WHITE LIGHT ILLUMINATOR / **RED LASER**

Multi-fuel rail-mounted light with red laser designed for subcompact handguns

- Features integrated 640-660nm red laser
- Interchangeable paddle switches accommodate your shooting style
- Front loading batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode: runs 60 hours

Description	Item #	COO	TAA
TLR-8 X sub (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, and (1) CR123A lithium battery	69411	US	YES
TLR-8 X sub (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool, and (1) CR123A lithium battery **Does not fit the P365® XMACRO*	69417	US	YES
TLR-8 X sub (1913) - Includes mounting kit with keys, multi-tool, and (1) CR123A lithium battery	69418	US	YES
TLR-8 X sub (1913OS) - Includes mounting kit with key, multi-tool, and (1) CR123A lithium battery	69419	US	YES

Size and Weight	Battery
2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g)	(1) SL-B9 battery pack or (1) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries

TLR-8® X G SUB

IPX4

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

Multi-fuel, rail-mounted light with green laser designed for subcompact handguns

- Features integrated 510-530nm green laser
- Interchangeable paddle switches accommodate your shooting style
- Front loading batteries

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 11 hours

Description	Item #	COO	TAA
TLR-8 X G sub (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black	69431	US	YES
TLR-8 X G sub (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black **Does not fit the P365® XMACRO*	69437	US	YES
TLR-8 X G sub (1913) - Includes mounting kit with keys, multi-tool and (1) CR123A lithium battery - Black	69438	US	YES
TLR-8 X G sub (1913OS) - Includes mounting kit with key, multi-tool and (1) CR123A lithium battery - Black	69439	US	YES

Size and Weight	Battery
2.51" (6.38 cm); CR123A: 2.77 oz (78.53g) // SL-B9: 2.87 oz (81.4g)	(1) SL-B9 battery pack or (1) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries

TLR-9®

WHITE LIGHT ILLUMINATOR

IPX7

Compact gun light designed to rapidly attach to full frame hand guns

- Produces a concentrated beam with optimum peripheral illumination
- Front-loading battery capability
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Strobe runs 3 hours

Description	Item #	COO	TAA
TLR-9 - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black	69464	US	YES

Size and Weight	Battery
3.87" (9.83 cm); 4.26 oz (120.8g)	(2) CR123A lithium batteries



Interchangeable paddle switches easy to swap out with multi-tool (included)



TLR-10®

IPX4

WHITE LIGHT ILLUMINATOR / **RED LASER**

Low profile gun light with red laser designed to rapidly attach to full frame hand guns

- Features a 640-660 nm red laser
- Produces a concentrated beam with optimum peripheral illumination
- Front-loading battery capability
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle



Safe Off feature prevents accidental activation; saves batteries

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Laser mode runs 60 hours

1000 LUMENS

Description	Item #	COO	TAA
TLR-10 - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black	69470	US	YES

Size and Weight	Battery
3.87" (9.82 cm); 4.62 oz (131g)	(2) CR123A lithium



Interchangeable paddle switches easy to swap out with multi-tool (included)

TLR-10® G

IPX4

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

Low profile gun light with green laser designed to rapidly attach to full frame hand guns

- Features a 510-530nm green laser
- Produces a concentrated beam with optimum peripheral illumination
- Front-loading battery capability
- Rail grip clamp securely attaches/detaches without putting your hands in front of the muzzle
- Interchangeable paddle switches accommodate your shooting style

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Laser mode runs 11 hours

Description	Item #	COO	TAA
TLR-10 G - Includes high switch (mounted), low switch, (2) CR123A lithium batteries and key kit - Black	69473	US	YES

Size and Weight	Battery
3.87" (9.82 cm); 4.62 oz (131g)	(2) CR123A lithium batteries



TLR-VIR® II

IPX7

WHITE LIGHT/ IR/ IR LASER COMBO ILLUMINATOR

White LED weapon light with infrared LED and laser options

- Two lighting modes available
- IR requires night vision goggles
- Windage and Elevation adjustment screws with tactile indication
- Securely fits M17/M18 pistols and all long guns with MIL-STD-1913 rails



LUMENS	300
CANDELA	5000
DISTANCE	600mW/sr
VISIBLE RUN TIME	1.5 hrs
IR RUN TIME	12 hrs



Description	Item #	COO	TAA
TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes Rail Locating Keys and (1) CR123A lithium battery - Coyote	69191	US	YES
TLR-VIR II - Visible LED/IR Illuminator/IR Laser - Includes Rail Locating Keys and (1) CR123A lithium battery - Black	69192	US	YES

Size and Weight	Battery
3.3" (8.39 cm); 3.82 oz (108g)	(1) CR123A lithium


STREAMLIGHT
WEDGE XT
TLR-7 Hi-x
STREAMLIGHT




SPEEDLOCKER

SPEEDLOCKER®

Portable, locking storage container that provides you with swift and direct access

- Patented mechanical keypad with 31 user selectable combinations; requires no batteries
- Rugged, water-resistant construction with convenient carry handle
- Accommodates various firearms





Description	Item #
SpeedLocker - Includes 3 ft (91.44 cm) security cable, padlock and Allen key - Black	59000
Padlock with 3 keys	59001
3' (91.44 cm) Security Cable	59002

Size and Weight
Internal: 8" x 7.1" (20.3 x 18 cm) External: 12.4" x 8.2" x 2.78" (31.5 x 20.8 x 7.1 cm); 2.6 lbs (1.2kg)

Notice: The SpeedLocker® is not an approved firearm safe. It is the user's responsibility to determine the suitability for the specific situation and need.



SL-B9® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

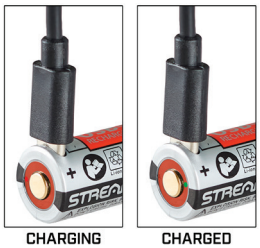
The battery that transforms multi-fuel, high performance gun lights into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 2.5 hours
- Integrated safety circuit protects battery from overcharge

Description	Item #
SL-B9 Li-Ion USB rechargeable battery pack - 2pk	20237
SL-B9 Li-Ion USB rechargeable battery pack - 8pk	20238
SL-B9 Li-Ion USB rechargeable battery pack - 100pk	20239
SL-B9 8-Unit Bank Charger - 12V - batteries not included	20230
SL-B9 8-Unit Bank Charger - 120V - Includes (8) SL-B9 batteries	20231
SL-B9 8-Unit Bank Charger - 12V DC - batteries not included	20233
SL-B9 8-Unit Bank Charger - 120V - Includes (8) SL-B9 batteries	20234
22" (55.88 cm) USB-C Cord	22084
40" (101.6 cm) USB-C Cord	22091

Size and Weight	Battery
1.36" x 0.67" (3.45 x 1.7 cm); 0.7 oz (19.8g)	850mAh SL-B9 protected Li-Ion USB rechargeable battery pack







NFPA Meets requirements of NFPA 1900-11.1.11.2 (2024); mounted in upright position



TLR RM SERIES

TLR® RM 1 HL-X

IPX7

Experience a longer-reaching, tighter beam with enhanced lumens and candela for superior visibility with this multi-fuel long gun light

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

	SL-B9	CR123A
LUMENS	1,000	500
CANDELA	22,000	11,000
DISTANCE	297m	210m
RUN TIME	30 min	1.5 hrs

22,000 cd



Safe Off feature prevents accidental activation; saves batteries

Description	Item #	COO	TAA
TLR RM 1 HL-X USB - System - Includes straight momentary pressure switch, key kit, USB-C cord and (1) SL-B9 battery pack - Black	69483	US	YES
TLR RM 1 HL-X USB - Light Only - Includes key kit, USB-C cord and (1) SL-B9 battery pack - Black	69484	US	YES



Optional M-LOK® mount sold separately

Size and Weight	Battery
3.64" (9.25 cm); SL-B9: 3.12 oz (88.5g) // CR123A: 3.02 oz (85.6g)	(1) SL-B9 battery pack (1) CR123A lithium battery

TLR® RM 1

IPX7

Designed for long guns, this compact light projects a far-reaching, high-candela beam - without compromising overall lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs

Strobe runs 3 hours



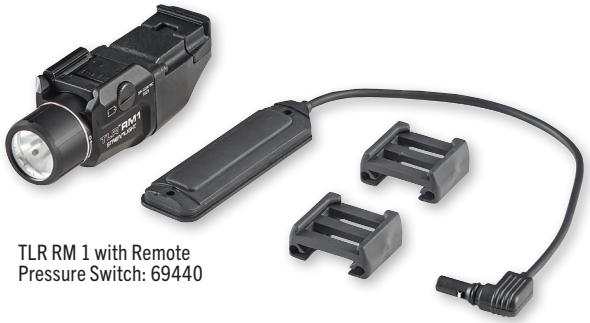
Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK® mount sold separately

Description	Item #	COO	TAA
TLR RM 1 - System - Includes remote pressure switch, mounting clips and (1) CR123A lithium battery - Black	69440	US	YES
TLR RM 1 - Light Only - Includes key kit and (1) CR123A lithium battery - Black	69441	US	YES
TLR RM 1 - with Dual Remote Switch - Black	69442	US	YES

Size and Weight	Battery
3.64" (9.25 cm); 3.02 oz (85.6g)	(1) CR123A lithium



TLR RM 1 with Remote Pressure Switch: 69440

TLR® RM 2

IPX7

Low-profile gun light delivers superior performance with a focused, long-range high-candela beam, all while sustaining a powerful lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries

22,000 cd

LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs

Strobe runs 3 hours



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK® mount sold separately

Description	Item #	COO	TAA
TLR RM 2 - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black	69450	US	YES
TLR RM 2 - Light Only - Includes (2) CR123A lithium batteries - Black	69451	US	YES

Size and Weight	Battery
4.97" (12.6 cm); 4.68 oz (132.7g)	(2) CR123A lithium



TLR RM 2 with Remote Pressure Switch: 69450

TLR® RM 1 LASER

WHITE LIGHT ILLUMINATOR / **RED LASER**

IPX4

Designed for long guns, this compact light projects a far-reaching, high-candela beam - without compromising overall lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries
- 640-660nm red laser

LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs

Strobe runs 3 hours
Laser runs 60 hours



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK® mount sold separately

Description	Item #	COO	TAA
TLR RM 1 Laser - System - Includes remote pressure switch, mounting clips and (1) CR123A lithium battery - Black	69445	US	YES
TLR RM 1 Laser - Light Only - Includes key kit and (1) CR123A lithium battery - Black	69446	US	YES

Size and Weight	Battery
3.64" (9.25 cm); 3.24 oz (91.9g)	(1) CR123A lithium



TLR RM 1 Laser with Remote Pressure Switch: 69445

TLR® RM 2 LASER

WHITE LIGHT ILLUMINATOR / **RED LASER**

IPX4

The TLR RM 2 Laser delivers superior performance with a focused, long-range high-candela beam, all while sustaining powerful lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading batteries
- 640-660nm red laser

LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs

Strobe runs 3 hours
Laser runs 60 hours

22,000 cd



Safe Off feature prevents accidental activation; saves batteries

Optional M-LOK® mount sold separately



Description	Item #	COO	TAA
TLR RM 2 Laser - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black	69447	US	YES
TLR RM 2 Laser - Light Only - Includes key kit and (2) CR123A lithium batteries - Black	69448	US	YES

Size and Weight	Battery
4.97" (12.6 cm); 5.11 oz (144.7g)	(2) CR123A lithium



TLR RM 2 Laser with Remote Pressure Switch: 69447

TLR® RM 1 LASER-G

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

Designed for long guns, this compact light projects a far-reaching, high-candela beam - without compromising overall lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading battery capability
- 510-530nm green laser

LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs

Strobe runs 3 hours
Laser runs 11 hours

Description	Item #	COO	TAA
TLR RM 1 Laser-G - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black	69443	US	YES
TLR RM 1 Laser-G - Light Only - Includes key kit and (2) CR123A lithium batteries	69444	US	YES

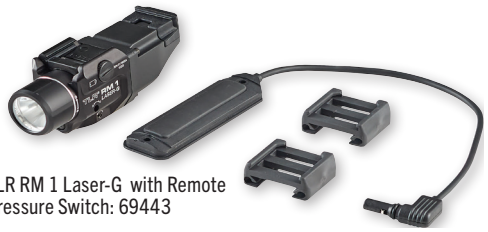
Size and Weight	Battery
3.64" (9.25 cm); 3.24 oz (91.9g)	(1) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK® mount sold separately



TLR RM 1 Laser-G with Remote Pressure Switch: 69443

TLR® RM 2 LASER-G

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

Low-profile gun light delivers superior performance with a focused, long-range high-candela beam, all while sustaining a powerful lumen output

- Independently operating push-button and remote pressure switches
- System is packaged as a kit
- Front loading battery capability
- 510-530nm green laser

LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs

Strobe runs 3 hours
Laser runs 11 hours

Description	Item #	COO	TAA
TLR RM 2 Laser-G - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black	69453	US	YES
TLR RM 2 Laser-G - Light Only - Includes key kit and (2) CR123A lithium batteries - Black	69454	US	YES

Size and Weight	Battery
4.97" (12.6 cm); 5.11 oz (144.7g)	(2) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK® mount sold separately



TLR RM 2 Laser-G with Remote Pressure Switch: 69453

TLR-1 HPL®

WHITE LIGHT ILLUMINATOR

IPX7

High candela, long-range, rail-mounted tactical light that produces an intensely bright, far-reaching wide beam

- Deep dish parabolic reflector produces long-range targeting beam with optimum peripheral illumination
- Available with either standard door switch or remote door switch

LUMENS	1,000
CANDELA	60,000
DISTANCE	490m
RUN TIME	1.5 hrs

1000 LUMENS



Description	Item #	COO	TAA
TLR-1 HPL Standard Switch - Includes Rail Locating Keys and (2) CR123A lithium batteries - Black	69215	US	YES
TLR-1 HPL Remote Switch - Includes Rail Locating Keys, remote switch, door switch and (2) CR123A lithium batteries - Black	69216	US	YES
TLR-1 HPL Long Gun Kit - Includes Safe off remote door switch, remote pressure switch, mounting clips, standard door switch and (2) CR123A lithium batteries - Black	69219	US	YES

Size and Weight	Battery
4.83" (12.27 cm); 5.6 oz (158.8g) // With Remote: 5.25" (13.34 cm); 5.9 oz (167.3g)	(2) CR123A lithium



Long gun kit
69219





TL-RACKER®

IPX7

All-in-one integrated shotgun forend light that reduces snag by eliminating the need for remote cords

- Ideal for shotgun breaching and close-quarter operations
- Ease of access with momentary and constant on modes
- Elongated switch pad accommodates virtually any hand size

1000 LUMENS



Mossberg 590® Shockwave model

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs

Models available for Mossberg 500®/590® and Remington 870™



Description	Item #	COO	TAA
TL-Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Black	69600	US	YES
TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Black	69601	US	YES
TL Racker - Mossberg 590 Shockwave with strap - Includes (2) CR123A lithium batteries - Black	69602	US	YES
TL Racker - Mossberg 500/590 - Includes (2) CR123A lithium batteries - Orange	69610	US	YES
TL Racker - Remington 870 - Includes (2) CR123A lithium batteries - Orange	69611	US	YES
TL-Racker Forend Wrench	69603	--	--

Note: For TL Rackers #69610 and #69611; Orange designed for less lethal options

Size and Weight	Battery
8” (20.32 cm); 12.1 oz (343g)	(2) CR123A lithium

TLR ACCESSORIES

	ITEM #	TLR-1 HL-X/ TLR-1 HP-X/ TLR-1 HP	TLR-1 HL/ TLR-2 HL	TLR-2 G/ TLR-2 HL G	TLR-1/ TLR-1s	TLR-2/ TLR-2s	TLR-3 X	TLR-VIR II	TLR-6	TLR-6 HL/ TLR-6 HL G	TLR-7 X USB	TLR-7 HL-X USB
Ambidextrous Vert. Grip with Rail	69114	√	√	√	√	√						
TLR 12 ga. Mag Mount Mag Tube/Mossberg Rail	69901	√	√	√	√	√	√				√	√
Remington 870 Mount	69906	√	√	√	√	√	√				√	√
TLR-1 and TLR-2 Key Kit	69175		√	√	√	√						
TLR-7 X/TLR-8 X/TLR-9/TLR-10 Key Kit	69177										√	√
TLR M-LOK® Mount	88301	√	√	√	√	√						
Contour Remote - GLOCK®	69300		√	√	√	√						
Contour Remote - M&P®	69310		√	√	√	√						
Contour Remote - SIG SAUER® P320®	69481		√	√	√	√						
TLR-1/TLR-2 Remote Door Switch	69130		√	√	√	√						
Door Switch with Safe Off	69161		√	√	√	√						
Tail Switch Kit TLR-7 X and TLR-9	69490										√	√
Tail Switch Kit TLR-8 X/TLR-8 X G/TLR-10/TLR-10 G	69491											
Tail Switch Kit TLR-7 X sub	69492											
Tail Switch Kit TLR-8 X sub/TLR-8 X G sub	69493											
Tape Switch	69132		√	√	√	√						
Coil Pressure Switch	69134		√	√	√	√						
Straight Momentary Pressure Switch	69135		√	√	√	√						
Straight Latching Pressure Switch	89008		√	√	√	√						
Dual Remote Switch	69138		√	√	√	√						
Remote Retaining Clips	88178		√	√	√	√		√				
Red Flip Lens	69115	√	√	√	√	√		√				
Blue Flip Lens	69116	√	√	√	√	√		√				
Green Flip Lens	69117	√	√	√	√	√		√				
IR Flip Lens	69118	√	√	√	√	√		√				
Opaque Flip Lens	69124	√	√	√	√	√		√				
CR123A Batteries - 2pk	85175	√	√	√	√	√	√	√			√	√
CR123A Batteries - 8pk	85180	√	√	√	√	√	√	√			√	√
CR123A Batteries - 12pk	85177	√	√	√	√	√	√	√			√	√
CR123A Batteries - 400pk	85179	√	√	√	√	√	√	√			√	√
CR1/3N Batteries - 2pk	69271								√			
CR1/3N Batteries - 12pk	69281								√			
SL-B9 Battery Pack - 2pk	20237	√					√				√	√
SL-B9 Battery Pack - 8pk	20238	√					√				√	√
SL-B9 Battery Pack - 100pk	20239	√					√				√	√
SL-B2 Battery - 2pk	22121									√		
SL-B2 Charging Case	22120									√		


69114


69901


69906


88301



69300, 69310, 69481


88178



TLR-8 HL-X TLR-8 HL-X G	TLR-8 X TLR-8 X G	TLR-7 X SUB	TLR-8 X SUB TLR-8 X G SUB	TLR-7 HL-X SUB TLR-8 HL-X SUB TLR-8 HL-X G SUB	TLR-7 X CONTOUR REMOTE	TLR-9	TLR-10 TLR-10 G	TLR® RM 1 HL-X USB	TLR RM 1 TLR RM-2 SERIES	TLR-1 HPL
										√
	√					√	√			√
	√					√	√			√
										√
	√					√	√	√	√	
								√	√	√
										√
										√
						√				
	√						√			
		√								
√			√	√						
										√
										√
								√	√	√
								√	√	√
								√	√	√
						√	√	√	√	√
√	√	√	√	√	√	√	√	√	√	√
√	√	√	√	√	√	√	√	√	√	√
√	√	√	√	√	√	√	√	√	√	√
√	√	√	√	√	√	√	√	√	√	√
√	√	√	√	√	√			√		
√	√	√	√	√	√			√		
√	√	√	√	√	√			√		


69175


69177


69130



69161


69490



69491



69493



69492


69132


69134


69135


89008



69138


20237, 20238,
20239


22121


22120


69271 and
69281


85175
85180
85177
85179

NEW

PROTAC® RAIL MOUNT 1L-X

IP67

Compact, multi-fuel, high-output tactical light designed for short-barreled rifles, carbines, and submachine guns

- **1L-X Pro:** Jack-Cap® tailcap switch that offers operational switch redundancy with push-button operation or remote pressure switch operation
- **1L-X:** Uses a standard push button tail switch for ease of activation without a pressure pad
- TEN-TAP® Programmable
- MIL-STD-1913 Picatinny rail and M-LOK® mounts included

SL-B9	HIGH	LOW
LUMENS	850	100
CANDELA	30,000	3,400
DISTANCE	346m	117m
RUN TIME	0.5 hrs	4.5 hrs

Strobe runs 1.25 hours

CR123A	HIGH	LOW
LUMENS	500	100
CANDELA	18,000	3,400
DISTANCE	268m	117m
RUN TIME	1.75 hrs	6.5 hrs

Strobe runs 2.5 hours



Standard push button tail switch



Description	Item #
ProTac Rail Mount 1L-X - Includes tailcap switch, mounting hardware, M-LOK® mount and (1) CR123A lithium battery - Black	89026
ProTac Rail Mount 1L-X USB - Includes tailcap switch, mounting hardware, M-LOK® mount and (1) SL-B9 battery pack and USB cord - Black	89027

Size and Weight	Battery
4.64" (11.79 cm); CR123A 5.5 oz (155.9g) // SL-B9 5.6 oz (158.8g)	(1) CR123A lithium battery or (1) SL-B9 battery

NEW

PROTAC® RAIL MOUNT 1L-X PRO

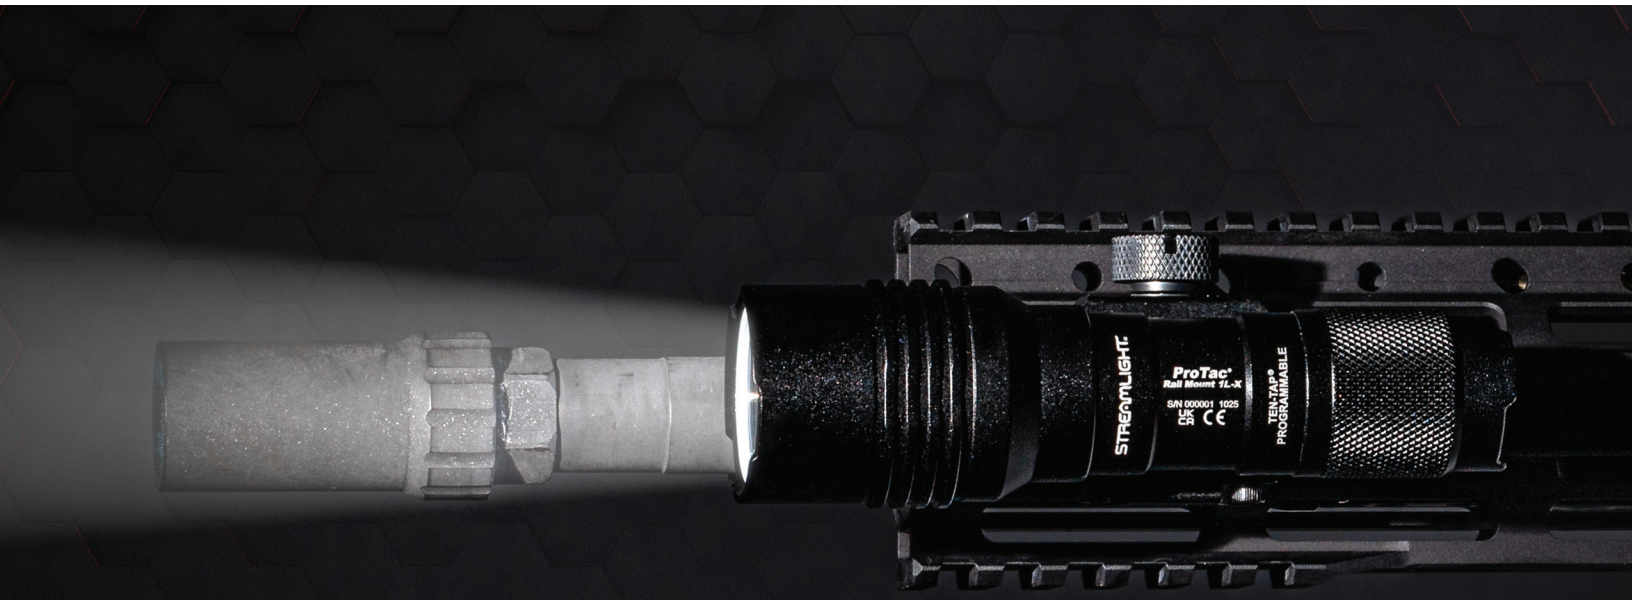
IP54

With Remote Pressure Switch installed

IP67

With Standard button switch installed

Description	Item #
ProTac Rail Mount 1L-X Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) CR123A lithium battery - Black	89024
ProTac Rail Mount 1L-X USB Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) SL-B9 battery pack and USB cord - Black	89025



GET MORE INFO AT: STREAMLIGHT.COM // TUNE INTO YOUTUBE.COM/STREAMLIGHTTV

PROTAC® RAIL MOUNT 1 LONG GUN LIGHT

IPX7
With Standard button switch installed

IPX4
With Remote Pressure Switch installed

Long gun light featuring a fixed mount for MIL-STD-1913 Picatinny rails or M-LOK® mount

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- Multi-fuel; uses either a lithium or alkaline battery
- TEN-TAP® Programmable

CR123A	HIGH	LOW
LUMENS	350	40
CANDELA	12,000	1,380
DISTANCE	219m	19m
RUN TIME	1.75 hrs	14.5 hrs

Strobe runs 3 hours

ALKALINE	HIGH	LOW
LUMENS	150	40
CANDELA	4,950	1,380
DISTANCE	141m	19m
RUN TIME	1.5 hrs	8 hrs

Strobe runs 2.75 hours



Description	Item #
ProTac Rail Mount 1 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK mount, (1) AA alkaline battery and (1) CR123A lithium battery - Black	88058

Size and Weight	Battery
4.25" (10.8 cm); CR123A: 4.3 oz (121.9g) // Alkaline: 4.5 oz (127.57g)	(1) CR123A lithium or (1) alkaline

M-LOK® is a registered trademark of Magpul Industries Corp. All rights reserved.

PROTAC® RAIL MOUNT 2 LONG GUN LIGHT

IPX7
With Standard button switch installed

IPX4
With Remote Pressure Switch installed

Lightweight, rugged long gun light equipped with a fixed mount compatible with MIL-STD-1913 Picatinny rails or M-LOK® mount for flexible installation options

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	625	60
CANDELA	22,000	2,000
DISTANCE	297m	89m
RUN TIME	2 hrs	21 hrs

Strobe runs 2.75 hours



Description	Item #
ProTac Rail Mount 2 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black	88059

Size and Weight	Battery
5" (12.7 cm); 5 oz (141.7g)	(2) CR123A lithium batteries



PROTAC® RAIL MOUNT HP-X PRO

IPX7 With Standard Button Switch installed

IPX4 With Remote Pressure Switch installed

Long range, high-candela long gun light with Jack Cap® switch

- Featured Jack-Cap® tailcap switch (as shown below) offers operational switch redundancy with both push-button operation or remote pressure switch operation
- TEN-TAP® Programmable



	HIGH	LOW
LUMENS	800	55
CANDELA	105,000	7,600
DISTANCE	648m	174m
RUN TIME SL-B26	2 hrs	26 hrs
RUN TIME CR123A	1.5 hrs	18 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

105,000 cd

Description	Item #
ProTac Rail Mount HP-X Pro - System - Includes Jack-Cap® tailcap switch, M-LOK mount, mounting hardware, Allen wrench, straight momentary pressure switch and (2) CR123A lithium batteries	89015
ProTac Rail Mount HP-X Pro USB - System - Includes Jack-Cap® tailcap switch, M-LOK® mount, mounting hardware, Allen wrench, straight momentary pressure switch, (1) SL-B26 battery pack and USB-C cord - Black	89016
ProTac Rail Mount HP-X Pro - Light Only - Includes Jack-Cap® tailcap switch, M-LOK mount, Allen wrench and (2) CR123A lithium batteries - Black	89017
ProTac Rail Mount HP-X Pro USB - Light Only - Includes Jack-Cap® tailcap switch, M-LOK mount, Allen wrench, (1) SL-B26 rechargeable battery pack and USB cord - Black	89018

Size and Weight	Battery
5.63" (14.3 cm); SL-B26: 7 oz (198g) // CR123A: 6.4 oz (181g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries



PROTAC® RAIL MOUNT HL-X LONG GUN LIGHT

IP54 With Remote Pressure Switch installed

IP67 With Standard button switch installed

High-lumen long gun light featuring a fixed mount for MIL-STD-1913 (Picatinny) rails or M-LOK® mount allowing for alternative mounting options

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	1000	60
CANDELA	50,000	3,100
DISTANCE	447m	111m
RUN TIME CR123A	1.25 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)



Description	Item #
ProTac Rail Mount HL-X - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium batteries - Black	88066
ProTac Rail Mount HL-X USB - Includes remote switch, tail switch, remote retaining clips mounting hardware, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black	88071

Size and Weight	Battery
5.43" (13.8 cm); CR123A: 6.4 oz (181.4g) // SL-B26: 6.9 oz (195.6g)	(2) CR123A lithium or (1) SL-B26 battery pack

M-LOK® is a registered trademark of Magpul Industries Corp. All rights reserved.

PROTAC® RAIL MOUNT HL-X PRO LONG GUN LIGHT

IP54 With Remote Pressure Switch installed

IP67 With Standard button switch installed

Long range, low-profile, long gun light features a Jack-Cap® tailcap switch that offers operational switch redundancy with both push-button operation or remote pressure switch operation



- MIL-STD-1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	1,000	60
CANDELA	50,000	3,100
DISTANCE	447m	111m
RUN TIME CR123A	1.25 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)



Description	Item #
ProTac Rail Mount HL-X Pro - Includes Jack-Cap®, momentary remote switch, remote retaining clips, mounting hardware, M-LOK mount and (2) CR123A lithium batteries - Black	88126
ProTac Rail Mount HL-X Pro USB - Includes Jack-Cap®, M-LOK® kit, momentary switch, hardware kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack and USB cord - Box - Black	88127
ProTac Rail Mount HL-X Pro - Light Only - Includes Jack-Cap®, M-LOK mount and (2) CR123A lithium batteries - Black	88128
ProTac Rail Mount HL-X Pro USB - Light Only - Includes Jack-Cap®, M-LOK mount, (1) SL-B26 battery pack and USB cord - Black	88129

Size and Weight	Battery
5.43" (13.8 cm); CR123A: 6.6 oz (187.1g) // SL-B26: 7.2 oz (204.1g)	(2) CR123A lithium or (1) SL-B26 battery pack

PROTAC® 2.0 RAIL MOUNT

IP67 IPX4

With Remote Pressure Switch installed

High-performance tactical light that produces 2,000 lumens without sacrificing run time

- Powered by our proprietary SL-B50 rechargeable battery pack that charges inside the light using a USB-C cord
- MIL-STD 1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	2,000	250
CANDELA	17,700	2,150
DISTANCE	266m	93m
RUN TIME	2.5 hrs	11 hrs

Strobe runs 4.5 hours

Description	Item #
ProTac 2.0 Rail Mount - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® mount - Black	89009
ProTac 2.0 Rail Mount - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK® mount - Black	89003

Size and Weight	Battery
6.3" (16 cm); 9.06 oz (257g)	(1) SL-B50 rechargeable battery pack

2000 LUMENS







PROTAC® 2.0 RAIL MOUNT HP

IP67

High-performance tactical light that offers perfect blend of power with 2,000 lumens and 85,000 candela

- Powered by our proprietary SL-B50 rechargeable battery pack
- Charges inside the light, no need to remove from your weapon
- TEN-TAP® Programmable

85,000 cd

	HIGH	LOW
LUMENS	2,000	250
CANDELA	85,000	11,500
DISTANCE	583m	214m
RUN TIME	2.5 hrs	11 hrs

Strobe runs 4.5 hours



Description	Item #
ProTac 2.0 Rail Mount HP - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® - Black	89014
ProTac 2.0 Rail Mount HP - Light Only - Includes (1) SL-B50 battery pack, USB-C cord and M-LOK mount - Black	89013

Size and Weight	Battery
6.3" (16 cm); 9.06 oz (257g)	(1) SL-B50 battery pack

NEW

PROTAC® RAIL MOUNT VIR PRO

IPX4 With Remote Pressure Switch installed

IPX7 With Standard button switch installed

Rail mount VIR long gun light delivers both visible white light and IR illumination, easily selectable via a head-mounted, mode selector switch.

- Integrated IR to white light safety cutoff
- Mode selector switch for IR/Off/White light
- Rotating head allows for precise placement next to the rail
- Integrated rail clamp attaches to MIL-STD-1913 (Picatinny) rail or M-LOK® compatible rails

	HIGH	MEDIUM	LOW	IR HIGH	IR LOW
LUMENS	1,100	540	120	2,300mW	600mW
CANDELA	40,000	19,000	4,200	---	---
DISTANCE	400m	276m	130m	---	---
RUN TIME SL-B26	2 hrs	3.75 hrs	14 hrs	2 hrs	9 hrs
RUN TIME CR123A	1.5 hrs	2.75 hrs	11 hrs	1.25 hrs	7.25 hrs







Description	Item #
ProTac Rail Mount VIR Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, and (2) CR123A lithium batteries - Black	88138
ProTac Rail Mount VIR USB Pro - Includes Jack Cap®, M-LOK® Kit, Momentary Switch, Hardware Kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack, 101.6 cm (40 in) USB Cord - Black	88139

M-LOK® is a registered trademark of Magpul Industries Corp.

Size and Weight	Battery
5.65" (14.4 cm); CR123A: 8.2 oz (231g) // Alkaline: 8.8 oz (249g)	(2) CR123A lithium or (1) SL-B26 battery pack



PROTAC RAIL MOUNT ACCESSORIES

DESCRIPTION	ITEM #	PROTAC RAIL MOUNT 1 RAIL MOUNT 2	PROTAC RAIL MOUNT HL-X	PROTAC RAIL MOUNT 1L-X	PROTAC RAIL MOUNT 1L-X PRO	PROTAC 2.0 RAIL MOUNT SERIES	PROTAC RAIL MOUNT HL-X PRO RAIL MOUNT HP-X PRO RAIL MOUNT VIR PRO
CR123A Lithium Batteries - 2pk	85175	√	√	√	√		√
CR123A Lithium Batteries - 6pk	85177	√	√	√	√		√
CR123A Lithium Batteries - 12pk	85179	√	√	√	√		√
CR123A Lithium Batteries - 400pk	85180	√	√	√	√		√
SL-B26 Battery Pack Charger Kit, USB (Includes (2) SL-B26 battery packs and USB cord)	22010		√				√
SL-B26 Battery Pack Charger Kit, 120V AC (Includes (2) SL-B26 battery packs and USB cord)	22011		√				√
8-Unit SL-B26 Bank Charger - 120V DC	20224		√				√
SL-B26 Battery Pack - 1pk	22101		√				√
SL-B50 Battery Pack - 1pk	22111					√	
SL-B9 Battery Pack - 2pk	20237			√	√		
120V AC USB Charge Cord	22071		√				
22" (55.88 cm) USB-C Cord	22084		√	√	√	√	
Red Filter	69115	√					
Blue Filter	69116	√					
Green Filter	69117	√					
IR Filter	69118	√					
Opaque Filter	69124	√					
M-LOK® Mount	88300	√	√	√	√	√	√
Jack-Cap®	88130						√
ProTac® 2.0 RM Tail Switch	89020					√	
Remote Retaining Clips	88178	√	√		√	√	√
Remote Switch	88125						
Remote Switch	88098	√					
Straight Momentary Pressure Switch	69135				√	√	√
TLR Dual Remote Switch	69138				√	√	
Straight Latching Switch	89008				√	√	√



85175, 85177, 85179, 85180


22010


22011


20224


22101



22111



20237


22071


22084



88300


88130



89020


88178


88098


69115, 69116, 69117, 69118, 69142


69135


89008


69138

WEDGE®

IPX7

Powerful, pocket friendly rechargeable EDC light

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes (as shown in image to the right)
- Ergonomic design fits comfortably in your hand
- Grooved for a sure grip





	THRO	CONSTANT-ON
LUMENS	1,000	300
CANDELA	3,000	1,200
DISTANCE	110m	69m
RUN TIME	35 sec	3 hrs

Description	Item #
Wedge - Includes USB-C cord, lanyard - Black	88810
Wedge - Includes USB-C cord, lanyard - Coyote	88811
Wedge - Includes USB-C cord, lanyard - Red	88814
Wedge - Includes USB-C cord, lanyard - Blue	88817
Wedge - Includes USB-C cord, lanyard - Purple	88818
Wedge - Includes USB-C cord, lanyard - Orange	88820
Wedge - Includes USB-C cord, lanyard - Lime Green	88821

Size and Weight	Battery
5.46" (13.87 cm); 3.3 oz (93.5g)	Lithium Polymer



Battery charge indicator located in the on/off switch
Charge indication:

Red – Charging // Green – Charged
Recharges in 5 hours

WEDGE® XT

IPX7

Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable



	HIGH	LOW
LUMENS	500	50
CANDELA	1,900	200
DISTANCE	87m	28m
RUN TIME	2 hrs	11 hrs

Description	Item #
Wedge XT - Includes USB-C cord, lanyard - Black	88812
Wedge XT - Includes USB-C cord, lanyard - Coyote	88813
Wedge XT - Includes USB-C cord, lanyard - Silver	88819

Size and Weight	Battery
4.25" (10.8 cm); 2.62 oz (74.3g)	Lithium Polymer



Charge indication LED:
Red – Charging; Green – Charged

Lithium polymer battery charges in 6 hours

NEW

WEDGE® SL

IPX4

Ultra-thin, unibody constructed, uniquely shaped EDC inspection flashlight

- Four LED Battery Status Indicator LED (Flashing: Charging // 4 Solid-Segment/ Stage Charge Indication shown in image below): 4 LEDs = 75%; 3 LEDs = 50-75%; 2 LEDs = 25-50%; 1 LED = 10-25%
- Recharges in 4 hours
- TEN-TAP® programming switch allows user selection of high (factory default) or low intensity for constant on
- Aluminum body for strength and lightweight durability

	THRO	HIGH	LOW
LUMENS	500	100	50
CANDELA	1,600	300	150
DISTANCE	80m	35m	24m
RUN TIME	---	1.75 hrs	3.5 hrs





0.28" (0.7cm)

Description	Item #
Wedge SL - Includes end cover - Black	88840
Wedge SL - Includes end cover - Coyote	88841
Wedge SL - Includes end cover - Silver	88842



Size and Weight	Battery
5.65" (14.36 cm); 1.14 oz (32.3g)	Lithium Polymer



PROTAC® 1L-1AA

IPX7

Ultra-compact, everyday carry flashlight

- TEN-TAP® Programmable
- Multi-fuel - accepts multiple battery sources

CR123A	HIGH	LOW
LUMENS	350	40
CANDELA	6,400	720
DISTANCE	160m	53m
RUN TIME	1.5 hrs	14 hrs

Strobe runs 3 hours

ALKALINE/LITHIUM	HIGH	LOW
LUMENS	150	40
CANDELA	2,750	720
DISTANCE	105m	53m
RUN TIME Alkaline	1 hr 20 min	7.5 hrs
RUN TIME Lithium	4.25 hrs	14 hrs

Strobe runs 3.5 hours (Alkaline) // 8 hours (Lithium)



Description	Item #
ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Black	88061
ProTac 1L-1AA - Includes (1) AA alkaline and CR123A lithium batteries - Coyote	88073

Size and Weight	Battery
4.25" (10.8 cm); CR123A: 2.5 oz (71g) // Alkaline: 2.8 oz (79g) // Lithium: 2.4 oz (68g)	(1) CR123A lithium or (1) AA alkaline; also accepts AA lithium

PROTAC® 2L-X

IPX7



Multi-fuel tactical light

- Multi-battery versatility
- Push-button tail switch for momentary or constant on operation
- Pocket clip for convenience

	HIGH	LOW
LUMENS	500	40
CANDELA	6,800	600
DISTANCE	165m	49m
RUN TIME CR123A	2.75 hrs	30 hrs
RUN TIME SL-B26	3.25 hrs	30 hrs

Strobe runs 3.25 hours (CR123A) // 4.5 hours (SL-B26)



Description	Item #
ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Clam - Black	88062
ProTac 2L-X - Includes (2) CR123A lithium batteries and holster - Box - Black	88063
ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Clam - Black	88082
ProTac 2L-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	88083

Size and Weight	Battery
5.14" (13 cm); SL-B26: 4.4 oz (125g) // CR123A: 3.9 oz (111g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

PROTAC® 2.0 HP

IP67

High-candela flashlight strikes the ideal balance between candela & lumens, ensuring both reach and brightness without compromise

- TEN-TAP® Programmable
- One-handed option of momentary, variable intensity or strobe mode
- Slide sleeve back to charge battery while inside the light
- Fully charges in 6 hours



	HIGH	MEDIUM	LOW
LUMENS	2,000	550	100
CANDELA	85,000	22,500	4,400
DISTANCE	583m	300m	132m
RUN TIME	2.5 hrs	5 hrs	31 hrs

Strobe runs 2 hours

Description	Item #
ProTac 2.0 HP - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black	89023

Size and Weight	Battery
6.1" (15.5 cm); 8.25 oz (234g)	(1) SL-B50 battery pack

PROTAC® 2.0

IP67

High-performance light that produces 2,000 lumens without sacrificing run time

- TEN-TAP® Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges inside the light
- Charges in 6 hours



	HIGH	MEDIUM	LOW
LUMENS	2,000	570	100
CANDELA	17,300	5,000	890
DISTANCE	262m	142m	60m
RUN TIME	2.5 hrs	4.5 hrs	25 hrs

Strobe runs 4 hours 25 minutes

Description	Item #
ProTac 2.0 - Includes (1) SL-B50 battery pack, USB-C cord and nylon holster - Black	89000

Size and Weight	Battery
6.1" (15.49 cm); 8.25 oz (234g)	(1) SL-B50 battery pack

PROTAC® 2AA-X

IPX7

Multi-fuel, personal carry tactical flashlight

- TEN-TAP® Programmable
- About the size of a marker, it conveniently fits in your pocket
- Multi-function, push-button tail switch

Lithium Polymer	HIGH	LOW
LUMENS	550	40
CANDELA	10,250	740
DISTANCE	203m	54m
RUN TIME	2.25 hrs	16 hrs

Strobe runs 4.5 hours

AA	HIGH	LOW
LUMENS	270	18
CANDELA	5,000	400
DISTANCE	141m	40m
RUN TIME	2.5 hrs	48 hrs

Strobe runs 5 hours

Description	Item #
ProTac 2AA-X USB - Includes (1) lithium polymer battery pack, USB-C cord and holster - Black	88135
ProTac 2AA-X USB - Includes (1) lithium polymer battery pack, USB-C cord and holster - Coyote	88137
ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Black	88033
ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Coyote	88072

Size and Weight	Battery
6" (15.3 cm); 3.5 oz (99g)	Lithium Polymer USB rechargeable battery or (2) AA alkaline



PROTAC® HP-X

IP68

Unique combination of compact size, high candela and long distance performance flashlight

- TEN-TAP® Programmable
- Multi-fuel - SL-B26® or lithium batteries
- Pocket clip for convenience

Description	Item #
ProTac HP-X - Includes (2) CR123A lithium batteries and holster - Box - Black	89021
ProTac HP-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	89022

Size and Weight	Battery
5.55" (14.1 cm); SL-B26: 5.9 oz (168g) // CR123A: 5.4 oz (154g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

	HIGH	MEDIUM	LOW
LUMENS	800	240	45
CANDELA	105,000	34,000	6,300
DISTANCE	648m	369m	159m
RUN TIME CR123A	1.5 hrs	4.25 hrs	24 hrs
RUN TIME SL-B26	2 hrs	5 hrs	31 hrs

Strobe runs 3 hours (CR123A) // 4.25 hours (SL-B26)

105,000 cd



PROTAC® HL-X

IP68

Multi-fuel flashlight produces a high-lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti-roll head design

1000 LUMENS

Description	Item #	COO	TAA
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Box - Black	95313	US	YES
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Clam - Black	88064	---	--
ProTac HL-X - Includes (2) CR123A lithium batteries and holster - Box - Black	88065	---	---
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	95314	US	YES
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Clam - Black	88084	---	---
ProTac HL-X USB - Includes (1) SL-B26 battery pack, USB cord and holster - Box - Black	88085	---	---

Size and Weight	Battery
5.43" (13.8 cm); SL-B26: 6.2 oz (176g) // CR123A: 5.7 oz (162g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

CR123A	HIGH	MEDIUM	LOW
LUMENS	1,000	400	65
CANDELA	27,100	10,000	1,600
DISTANCE	330m	200m	80m
RUN TIME	1.25 hrs	3 hrs	20 hrs

Strobe runs 2.5 hours



SL-B26	HIGH	MEDIUM	LOW
LUMENS	1,300	420	70
CANDELA	35,000	11,000	1,800
DISTANCE	374m	210m	85m
RUN TIME	1.5 hrs	3.75 hrs	25 hrs

Strobe runs 3.25 hours

PROTAC HL® USB

IPX4

High-lumen, USB rechargeable tactical light

- Self-adjusting battery cradle secures multiple battery sizes and eliminates battery rattle
- TEN-TAP® Programmable

1000 LUMENS





	HIGH	MEDIUM	LOW
LUMENS	1,000	380	65
CANDELA	12,000	4,420	700
DISTANCE	219m	133m	53m
RUN TIME	1.5 hrs	3.5 hrs	23 hrs

Strobe runs 1.5 hours

Description	Item #
ProTac HL USB - 120V AC/12V DC & holster - Black	88054
ProTac HL USB - Includes USB cord - Black	88052

Size and Weight	Battery
6.5” (16.5 cm); 7.2 oz (204g)	Lithium-ion battery - uses the same battery (#74175) as the Strion; also (1) SL-B26 battery pack or (2) CR123A lithium

PROTAC HL® 6

IPX7

Full-size, high-lumen rechargeable flashlight

- TEN-TAP® Programmable
- Recharges in 5 hours
- Sure grip rubber sleeve provides thermal insulation

	HIGH	MEDIUM	LOW
LUMENS	5,300	1,500	450
CANDELA	80,000	23,000	6,700
DISTANCE	566m	303m	164m
RUN TIME	2 hrs	3.75 hrs	12.5 hrs

Strobe runs 4 hours

5300 LUMENS



Description	Item #
ProTac HL 6 - Includes 120V AC Adapter, (2) SL-B48 battery packs, “Y” USB-C cord and wrist lanyard - Black	88131
ProTac HL 6 - Includes (2) SL-B48 battery packs, “Y” USB-C cord and wrist lanyard - Black	88132

Size and Weight	Battery
10.5” (26.6 cm); 1.3 lbs (590g)	(2) SL-B48 battery packs

PROTAC® 90X

IPX7

Multi-fuel, right angle, everyday carry light

- Features a right angle head that gives extra lighting capability
- TEN-TAP® Programmable
- Carry in your hand, attach to belt, harnesses or other gear

1000 LUMENS



	HIGH	MEDIUM	LOW
LUMENS	1,000	300	65
CANDELA	7,350	2,060	450
DISTANCE	171m	91m	42m
RUN TIME CR123A	2.5 hrs	4 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	4.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

Description	Item #
ProTac 90X - Includes (2) CR123A lithium batteries and holster - Black	88094
ProTac 90X USB - Includes (1) SL-B26 battery pack and holster - Black	88095

Size and Weight	Battery
4.39” (11.1 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

NEW

POLYTAC® 1X

IPX7

Professional quality, multi-fuel flashlight with polymer construction for lightweight durability

- High-impact, super-tough nylon polymer with “rocky stipple” texture for a sure grip
- TEN-TAP® Programmable
- Removable, two way pocket clip



CR123A	HIGH	LOW
LUMENS	350	40
CANDELA	12,000	1,000
DISTANCE	219m	63m
RUN TIME	1.5 hrs	14 hrs

Strobe runs 2.25 hours

SL-B9	HIGH	LOW
LUMENS	500	40
CANDELA	18,000	1,000
DISTANCE	268m	63m
RUN TIME	1 hr	8 hrs

Strobe runs 1.75 hours

AA	HIGH	LOW
LUMENS	150	40
CANDELA	5,000	1,000
DISTANCE	141m	63m
RUN TIME	5 hrs	14 hrs

Strobe runs 7 hours

Description	Item #	COO	TAA
PolyTac 1X - Includes (1) CR123A lithium battery and (1) AA alkaline battery- Black	86000	US	YES
PolyTac 1X - Includes (1) CR123A lithium battery and (1) AA alkaline battery- Yellow	86002	US	YES
PolyTac 1X USB - Includes (1) SL-B9 battery pack - Black	86001	US	YES
PolyTac 1X USB - Includes (1) SL-B9 battery pack - Yellow	86003	US	YES

Size and Weight	Battery
4.71” (11.96 cm); SL-B9: 3.03 oz (85.9g) // CR123A: 2.93 oz (83.1g) // AA: 3.20 oz (90.7g)	(1) SL-B9 battery pack, (1) CR123A lithium battery or (1) AA alkaline battery

POLYTAC® X

IPX7

Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with “rocky stipple” texture for a sure grip
- TEN-TAP® Programmable
- Removable, multi-position pocket clip

NFPA
Flashlight meets 500°F requirements of NFPA 1970–14.2 (2025)

	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	11,485	4,930	675
DISTANCE	205m	135m	50m
RUN TIME CR123A	2.75 hrs	5.5 hrs	34 hrs
RUN TIME SL-B26	3.5 hrs	5.75 hrs	36 hrs

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)



Description	Clam	Box	COO	TAA
PolyTac X - Includes (2) CR123A lithium batteries - Black	88600	88603	US	YES
PolyTac X - Includes (2) CR123A lithium batteries - Yellow	88601	88604	US	YES
PolyTac X - Includes (2) CR123A lithium batteries - Coyote	88602	88605	US	YES
PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Black	88610	88613	--	--
PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Yellow	88611	88614	--	--
PolyTac X USB - Includes (1) SL-B26 battery pack and USB cord - Coyote	88612	88615	--	--

Size and Weight	Battery
5.46” (13.9 cm); SL-B26: 4.9 oz (139g) // CR123A: 4.4 oz (125g)	(1) SL-B26 battery pack or (2) CR123A lithium batteries

PROTAC® // POLYTAC® ACCESSORIES

DESCRIPTION	ITEM #	PROTAC 1L-1AA	PROTAC 2AA-X USB	PROTAC 2.0	PROTAC 2L-X	PROTAC HL-X	PROTAC HL 6	POLYTAC X	POLYTAC 1X
CR123A Lithium-ion Batteries - 2pk	85175	√			√	√		√	√
CR123A Lithium-ion Batteries - 6pk	85180	√			√	√		√	√
CR123A Lithium-ion Batteries - 12pk	85177	√			√	√		√	√
CR123A Lithium-ion Batteries - 400pk	85179	√			√	√		√	√
120V AC USB Charge Cord	22071				√	√		√	
Li-Ion USB Battery Charge Cradle	22100				√	√		√	
SL-B26 Battery Pack - 1pk	22101				√	√		√	
SL-B26 Battery Pack - 2pk	22102				√	√		√	
SL-B50 Battery Pack - 1pk	22111			√					
SL-B50 Battery Pack - 2pk	22112			√					
SL-B48 Battery Pack	88133						√		
SL-B9 Battery Pack - 2pk	20237								√
SL-B9 Battery Pack - 8pk	20238								√
SL-B9 Battery Pack - 100pk	20239								√
Lithium Polymer Battery Pack	88136		√						
22" (55.88 cm) USB-C Cord	22084		√	√	√	√		√	
"Y" USB-C Cord	22090						√		
Nylon Holster	88037	√							
Nylon Holster	88038		√						
Nylon Holster	88086			√					
Nylon Holster	85905							√	√
Nylon Holster	85909							√	
Red Filter	69115								√
Blue Filter	69116								√
Green Filter	69117								√
IR Filter	69118								√
Flip Lens - Red	85115							√	
Flip Lens - Blue	85116							√	
Flip Lens - Green	85117							√	
Flip Lens - IR	74039							√	
Red Safety Wand	61311								√
Rubber Helmet Strap	99075							√	


85175, 85180, 85177, 85179


22101, 22102


22111, 22112


20237,20238,20239


88133


88136


88038, 88086


85905


85909


88037


22090


22084


22071


22100


69115, 69116, 69117, 69118


85115, 88116, 88117, 74039


61311


99075

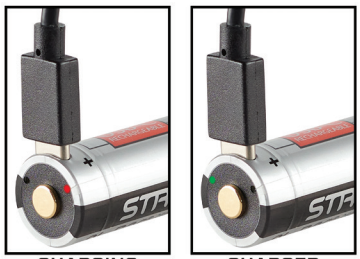
SL-B26® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle



Description	Item #
SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk	22101
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk	22102
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk - Box	22104
SL-B26 Li-Ion USB Rechargeable Battery Pack - 8pk	22105
Li-Ion Charge Cradle	22100
Li-ion Rechargeable Battery Kit - Includes USB cord and (2) SL-B26 battery packs	22010
Li-Ion Battery Pack Kit - 120V AC - Includes (2) SL-B26 battery packs	22011
22” (55.88 cm) Micro USB Cord - For use with charge cradle	22081
40” (101.6) Micro USB Cord - For use with charge cradle	22070
22” (55.88 cm) USB-C Cord	22084
40” (101.6) USB-C Cord	22091



CHARGING CHARGED

Size and Weight	Battery
Battery: 2.75” (7 cm); 1.7 oz (48g) Cradle: 4.5” (11.4 cm); 2.4 oz (68g)	2600mAh SL-B26 protected Li-Ion USB rechargeable battery pack



EIGHT-UNIT SL-B26® BANK CHARGER

Charge up to eight batteries with Streamlight’s SL-B26® bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1” (2.54 cm) low profile housing



NFPA

Meets requirements of NFPA 1900-11.1.11.2 (2024); mounted in upright position

Description	Item #
8-Unit Bank Charger - 12V DC - batteries not included	20220
8-Unit Bank Charger - 120V/100V AC- batteries not included	20221
8-Unit Bank Charger - 12V DC - Includes (8) SL-B26 batteries	20223
8-Unit Bank Charger - 120V/100V AC - Includes (8) SL-B26 batteries	20224
120V AC Cord	44909
12V DC Cord	44923

Size and Weight
10.45 x 4.74 x 1 in (26.54 x 12.06 x 2.54 cm) 7.6 oz (216g) with batteries // 20.88 oz (592g) without batteries

SL-B50® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that was designed for select Streamlight products

- Features USB-C input and charge status indicators; recharges in 6 hours
- Integrated safety circuit protects battery from overcharge



Description	Item #
SL-B50 Li-Ion USB rechargeable battery pack - 1pk	22111
SL-B50 Li-Ion USB rechargeable battery pack - 2pk	22112
22" (55.88 cm) USB-C Cord	22084

Size and Weight	Battery
3.26" (8.28 cm); 3 oz (85g)	4900mAh SL-B26 protected Li-Ion USB rechargeable battery pack



CHARGING CHARGED

IMPROVE SUSTAINABILITY & LOWER COST THROUGH STREAMLIGHT RECHARGEABILITY

Switching just one alkaline battery powered flashlight to a Streamlight rechargeable can save hundreds of pounds of carbon emissions and chemical battery waste per year.



99%
Carbon Footprint Reduction Switching from AA Alkaline to Rechargeable

42 LBS.
Chemical Battery Waste Spared from Landfills

20%
Life Cycle Cost Savings in the First Year

SIDEWINDER® SERIES

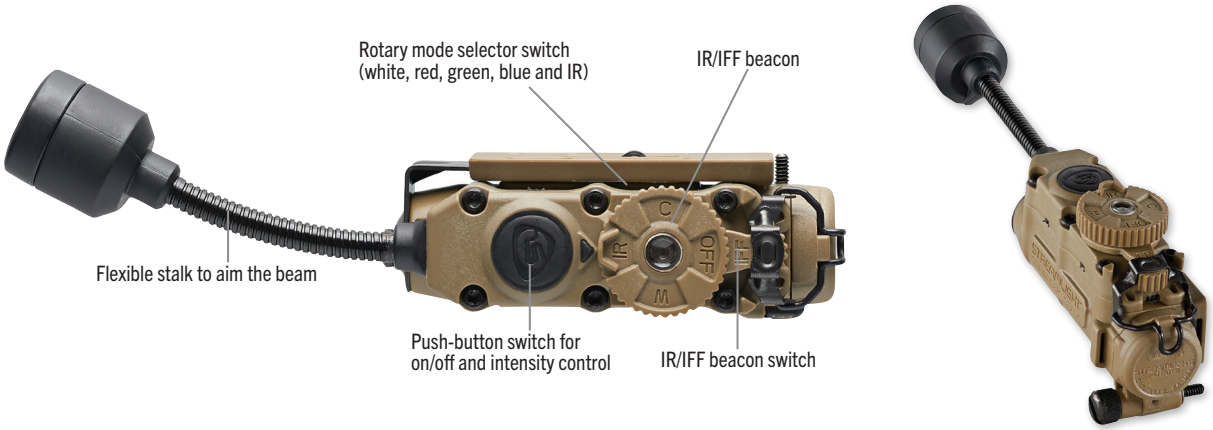
SIDEWINDER STALK®

IP67

Military helmet light system with flexible stalk

- Provides ultimate maneuverability, multiple mounting options, and a flexible stalk to aim the beam
- Features white, IR, red, blue, and green LEDs – all located in the head mounted on a flexible stalk – each with low, medium, high, and strobe modes along with an additional IR/IFF beacon
- A separate Identification Friend or Foe (IFF) switch lets you use both the main light and IFF when needed





The Sidewinder Stalk can be configured to mount on any type of combat, vehicle crew or aviation helmet system and/or MOLLE vest platform, or be directly attached to the brim of a patrol cap.

#14303 - Sidewinder Stalk Helmet Clip



#14304 - Sidewinder Stalk ARC Rail Clip



#14305 - Sidewinder Stalk ARC Rail Mount



High 100% Output - CR123A

	WHITE LED	IR LED	RED LED	BLUE LED	GREEN LED	3535 IFF IR IED
LUMENS	76	5.0 lmW/sr (min) radiant intensity	9	8	20	5.0 lmW/sr (min) radiant intensity
DISTANCE	28m	---	7m	8m	12m	---
RUN TIME	5.6 hrs	32 hrs	19 hrs	13 hrs	13 hrs	21 hrs

High 100% Output - AA LITHIUM/ALKALINE

	WHITE LED	IR LED	RED LED	BLUE LED	GREEN LED	3535 IFF IR IED
LUMENS	57	5.0 lmW/sr (min) radiant intensity	9	8	20	5.0 lmW/sr (min) radiant intensity
DISTANCE	23m	---	7m	8m	12m	---
RUN TIME Lithium	6 hrs	33 hrs	19 hrs	13 hrs	13 hrs	32 hrs
RUN TIME Alkaline	3.8 hrs	20 hrs	10 hrs	6 hrs	5 hrs	19 hrs

Description	Item #
Sidewinder Stalk - Includes helmet clip, CR123A and AA alkaline batteries - Coyote - Mailer	14300
Sidewinder Stalk - Includes helmet clip, CR123A and AA alkaline batteries - Black - Mailer	14310
Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, CR123A and AA alkaline battery - Coyote - Mailer	14301
Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, CR123A and AA alkaline battery - Black - Mailer	14311
Sidewinder Stalk - Includes helmet clip, E-Mount, CR123A and AA alkaline batteries - Coyote - Mailer	14302
Sidewinder Stalk - Includes helmet clip, CR123A and AA alkaline batteries - Coyote - Retail Box	14306
Sidewinder Stalk - Includes ARC rail mount and assembly, CR123A and AA alkaline batteries - Coyote - Retail Box	14307
Sidewinder Stalk - Includes helmet clip, E-Mount, CR123A and AA alkaline batteries - Coyote - Retail Box	14308

Size and Weight	Battery
5.5" (14 cm); AA battery with Loop and Hook Adapter: 2.88 oz (81.65g) // CR123A battery with Loop and Hook Adapter: 3.2 oz (90.7g)	(1) AA alkaline or lithium or (1) CR123A lithium batteries

SIDEWINDER STALK BATTERY RUN TIME				
CR123A LITHIUM BATTERY				
LED	LOW	MEDIUM	HIGH	STROBE
WHITE	95 hrs	15 hrs	5.6 hrs	11 hrs
RED	112 hrs	36 hrs	19 hrs	34 hrs
GREEN	80 hrs	27 hrs	13 hrs	25 hrs
BLUE	80 hrs	27 hrs	13 hrs	25 hrs
IR	174 hrs	57 hrs	32 hrs	61 hrs
IR W/ IFF BEACON	150 hrs	40 hrs	21 hrs	43 hrs
AA LITHIUM / ALKALINE BATTERY				
WHITE	79 hrs (lith) 66 hrs (alk)	16 hrs (lith) 8 hrs (alk)	6 hrs (lith) 3.8 hrs (alk)	11 hrs (lith) 5.5 hrs (alk)
RED	109 hrs (lith) 85 hrs (alk)	36 hrs (lith) 24 hrs (alk)	19 hrs (lith) 10 hrs (alk)	36 hrs (lith) 25 hrs (alk)
GREEN	84 hrs (lith) 55 hrs (alk)	26 hrs (lith) 15 hrs (alk)	13 hrs (lith) 5 hrs (alk)	23 hrs (lith) 17 hrs (alk)
BLUE	77 hrs (lith) 61 hrs (alk)	25 hrs (lith) 16 hrs (alk)	13 hrs (lith) 6 hrs (alk)	25 hrs (lith) 18 hrs (alk)
IR	173 hrs (lith) 145 hrs (alk)	55 hrs (lith) 39 hrs (alk)	33 hrs (lith) 20 hrs (alk)	60 hrs (lith) 41 hrs (alk)
IR W/ IFF BEACON	187 hrs (lith) 115 hrs (alk)	51 hrs (lith) 38 hrs (alk)	32 hrs (lith) 19 hrs (alk)	47 hrs (lith) 35 hrs (alk)

SIDEWINDER®

IPX7

High-impact, hands-free military light with 185° tilting head

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Gear clip to allow for ideal postioning of the light



	HIGH
LUMENS	55
CANDELA	1,175
DISTANCE	69m
RUN TIME	5.5 hrs

Description	Item #	COO	TAA
Sidewinder Military - Includes (2) AA alkaline batteries - Clam - Coyote	14000	US	YES
Sidewinder Military - Includes helmet mount and (2) AA alkaline batteries - Clam - Coyote	14027	US	YES
Sidewinder Military - Includes E-mount and (2) AA alkaline batteries - Clam - Coyote	14031	US	YES
Sidewinder Aviation - Includes (2) AA alkaline batteries - Clam - Coyote	14008	US	YES
Sidewinder Aviation - Includes MOLLE retainer and (2) AA alkaline batteries - Box - Coyote	14024	US	YES

***Military Model:** white, red, blue IR LEDS // **Aviation Model:** white, green, blue IR LEDS*

PM AIR WARRIOR APPROVED

SIDEWINDER® RESCUE

IPX7

Lightweight, built for life-saving visibility with a 185° articulating head

- Flashing beacon coupled with "Slide-in-Place" diffuser projects omni-directional light to signal for help
- Securely attached to MOLLE or other straps using MOLLE retainer
- Rescue Model includes white, green, blue and IR LEDs with diffuser



Description	Item #	COO	TAA
Sidewinder Rescue Kit - Includes MOLLE retainer, paracord and (2) AA alkaline batteries - Box - Coyote	14065	US	YES
Sidewinder Rescue Kit - Includes MOLLE retainer, paracord and (2) AA alkaline batteries - Clam - Coyote	14069	US	YES
Sidewinder Rescue - Includes (2) AA alkaline batteries - Clam - Coyote	14067	US	YES

Size and Weight	Battery
2.34" (5.94 cm); Lithium: 4.38 oz (124g) // Alkaline: 5.02 oz (142g)	(2) AA alkaline or AA lithium for extended operation in extreme temperatures (-40°F to +150°F)

SIDEWINDER BOOT®

IPX7

A durable, hands-free task flashlight used as a standard light for boot camp, recruit/basic training and wherever extra military instruction occurs

- Features a super-tough, high-impact polymer case that's durable and weather resistant
- Includes an integrated red filter that slides into place when needed



	HIGH	LOW
LUMENS	55	7
CANDELA	1,000	140
DISTANCE	63m	24m
RUN TIME	8 hrs	90 hrs

Description	Item #
Sidewinder Boot - Includes (2) AA alkaline batteries - Coyote	14975

Size and Weight	Battery
1.86" (4.72 cm); Lithium: 2.88 oz (82g) // Alkaline: 3.52 oz (100g)	(2) AA alkaline or AA lithium

SIDEWINDER COMPACT® III

IPX7

Ultra Compact, high-output, multi-fuel flashlight with 185° tilting head

- User Configurable Model Option – White / 2 LED Color Options (choose from Red, Green, or Blue) / IR LEDs
- Pull-to-turn rotary selector knob prevents accidental mode changes and allows selection of LED color
- Durable clip with integral mounting features
- Fits existing Sidewinder mounts and adapters

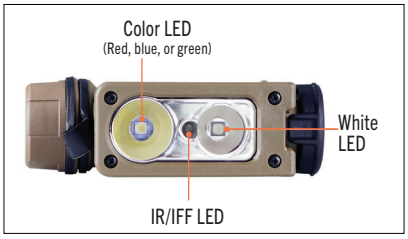


	Alkaline White LED				CR123A White LED			
	HIGH	MED 2	MED 1	LOW	HIGH	MED 2	MED 1	LOW
LUMENS	140	85	35	4	275	80	35	5
CANDELA	1,800	1,000	450	60	3,200	900	400	50
DISTANCE	85m	63m	42m	15m	113m	60m	40m	14m
RUN TIME	4 hrs	6 hrs	10 hrs	70+ hrs	2.75 hrs	8 hrs	19 hrs	100+ hrs

Strobe runs 8 hrs (Alkaline) // 5.75 hrs (CR123A)

IR and Color LEDs

		IR	RED	BLUE	GREEN
HIGH MODE	LUMENS	50mW	6.5	2.0	8.0
	CANDELA	---	40	12	83
	DISTANCE	---	13m	7m	18m
	RUN TIME	20 hrs (AA) 20 hrs (CR123A)	25 hrs (AA) // 30 hrs (CR123A)		
LOWER MODE	MED 2 (60%)	65 hrs (AA) 65 hrs (CR123A)	45+ hrs (AA) // 70 hrs (CR123A)		
	MED 1 (25%)	150 hrs (AA) 170 hrs (CR123A)	110+ hrs (AA) // 150 hrs (CR123A)		
	LOW (5%)	250 hrs (AA) 300+ hrs (CR123A)	250+ hrs (AA) // 200+ hrs (CR123A)		
	STROBE	40+ hrs (AA) // 50+ hrs (CR123A)			



User Configurable (UC) Model allows user to select two of three color options (red, green, blue)

Description	Item #
Sidewinder Compact III - UC (User Configurable) Model - Includes (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14213
Sidewinder Compact III - UC (User Configurable) Model - Includes high offset ARC rail mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14210
Sidewinder Compact III - UC (User Configurable) Model - Includes Hook & Loop Mount, headstrap, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14211
Sidewinder Compact III - UC (User Configurable) Model - Includes E-mount, headstrap, (1) AA alkaline and (1) CR123A lithium battery - Coyote	14519
Sidewinder Compact III - Military Model - Includes E-mount, (1) AA alkaline battery and (1) CR123A lithium battery - Coyote	14510
Sidewinder Compact III - Military Model - Includes E-mount, headstrap, (1) AA alkaline and (1) CR123A lithium battery - Coyote	14513
Sidewinder Compact III - Military Model - Includes (1) AA alkaline and (1) CR123A lithium battery - Coyote	14516
Sidewinder Compact III - Aviation Model - Includes NVG mount (works with HGU-84 rotary wing aircrew helmet), (1) CR123A lithium battery and (1) AA alkaline battery - Coyote	14533

MILITARY MODEL






AVIATION MODEL





USER CONFIGURABLE MODEL





***Military Model:** white, red, blue IR LEDS // **Aviation Model:** white, green, blue IR LEDS // **UC Model:** user chooses two of the three colors - red, green or blue IR LEDs*

Size and Weight	Battery
2.0" (5.1 cm); CR123A: 2.7 oz (76.5g) // Alkaline: 3 oz (85g)	(1) CR123A lithium, (1) AA alkaline, or (1) AA lithium battery

SIDEWINDER® X

IPX7

High-output, multi-fuel right-angle light with 185° tilt, gear clip, and multi-color LEDs for any mission

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Fits existing Sidewinder helmet mounts and adapters

	HIGH	MED 2	MED 2	LOW
LUMENS	275	80	35	5
CANDELA	3,200	900	400	50
DISTANCE	113m	60m	40m	14m
RUN TIME Alkaline	4.75 hrs	13 hrs	30 hrs	150+ hrs
RUN TIME CR123A	2.75 hrs	8 hrs	19 hrs	100+ hrs

Strobe runs 10.5 hours (AA) // 5.75 hours (CR123A)



MILITARY MODEL



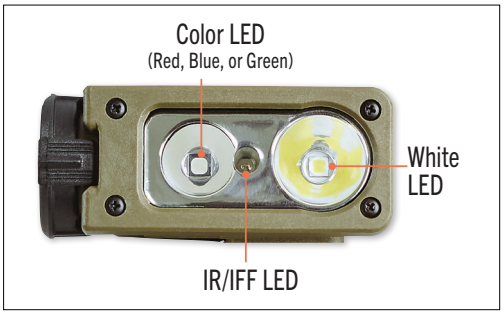
AVIATION MODEL



USER CONFIGURABLE MODEL



(user chooses between red, green, or blue)





Push button on/off switch and rotary selector knob

Gear clip with integrated helmet mount features

Description	Item #	COO	TAA
Sidewinder X UC (User Configurable) Model - Includes (2) AA alkaline batteries - Coyote	14803	US	YES
Sidewinder X Military Model - White, Red, Blue, IR LEDs - Includes E-Mount and (2) AA alkaline batteries - Coyote	14800	US	YES
Sidewinder X Military Model - White, Red, Blue, IR LEDs - Includes (2) AA alkaline batteries - Coyote	14801	US	YES
Sidewinder X Aviation Model - White, Green, Blue, IR LEDs - Includes MOLLE retainer and (2) AA alkaline batteries - Coyote	14802	US	YES

Size and Weight	Battery
2.4" (6.1 cm); CR123A: 3.3 oz (93.6g) // AA: 4.4 oz (124.7g)	(2) AA alkaline batteries or (1) CR123A lithium for extended operation in extreme temps (-40°F to +150°F)

IR & Color LEDs					
		IR	RED	BLUE	GREEN
HIGH MODE	LUMENS	50mW	6.5	2.0	8.0
	CANDELA	---	40	12	83
	DISTANCE	---	13m	7m	18m
	RUN TIME Alkaline	40 hrs	50 hrs		
	RUN TIME CR123A	20 hrs	30 hrs		
LOWER MODE	MED 2 (60%)	130 hrs (AA) 65 hrs (CR123A)	100 hrs (AA) // 70 hrs (CR123A)		
	MED 1 (25%)	330 hrs (AA) 170 hrs (CR123A)	250 hrs (AA) // 150 hrs (CR123A)		
	LOW (5%)	600+ hrs (AA) 300+ hrs (CR123A)	300+ hrs (AA) // 200+ hrs (CR123A)		
	STROBE	100+ hrs (AA) // 50+ hrs (CR123A)			

SIDEWINDER® ACCESSORIES

DESCRIPTION	ITEM #	SIDEWINDER X	SIDEWINDER	SIDEWINDER COMPACT III	SIDEWINDER STALK	SIDEWINDER BOOT
Helmet Clip - Black	14303				√	
ARC Rail Clip - Coyote	14304				√	
ARC Rail Mount - Coyote	14305				√	
Rail Mount for Helmet - Coyote	14057	√	√	√	√	√
Hook and Loop Mount	14073	√	√	√	√	√
Contour Arc Rail Mount	14114	√	√	√	√	√
Sidewinder® High Offset ARC Mount	14115	√			√	
Night Vision Goggle Mount - Tactical (works with DoD, NATO, & ISAF combat helmets)	14155	√	√	√	√	√
Night Vision Goggle Mount - Aviation (works with HGU-84 rotary wing aircrew helmets)	14135	√	√	√	√	√
Safety Wand - Glow in the Dark	14902		√			
Elastic Headstrap	14059	√	√	√		√
E-Mount (ACH, ECH, MICH, LWH compatible)	14136	√	√	√	√	√
Paracord	14138	√	√	√		√
E-Mount Kit - Includes E-mount, headstrap, and MOLLE plate	14112	√	√	√		√
Rail Mount Kit - Includes rail mount, headstrap and MOLLE plate	14113	√	√	√		√
MOLLE Retainer Replacement	14030	√	√	√		
CR123A Batteries (2 pack)	85175	√	√	√	√	
CR123A Batteries (6 pack)	85180	√	√	√	√	
CR123A Batteries (12 pack)	85177	√	√	√	√	
CR123A Batteries (400 pack)	85179	√	√	√	√	



NEW

SLEDGE®

IPX4

Low profile, multi-fuel flood headlamp

- Delivers up to 600 lumens of consistent output, with THRO® mode providing a short burst of 1,000 lumens
- Multi-function push-button switch easy to use with gloves
- 45° tilting head





	THRO	HIGH	MEDIUM	LOW
LUMENS	1,000	600	300	100
CANDELA	3,000	1,800	850	310
DISTANCE	110m	85m	58m	35m
RUN TIME	60 sec	4.25 hrs	9.25 hrs	13 hrs

Description	Item #
Sledge - Includes elastic and rubber hard hat headstrap, (1) SL-B26 battery pack and USB-C cord - Black	89019

Size and Weight	Battery
1.57" (4 cm); 4.6 oz (121.9g)	(1) SL-B26 battery pack

SL-SIDESADDLE®

IPX7

Universal hat light designed to mount directly to a wide variety of hats

- Charge and/or replace the batteries without removing from the mount
- Use the "quick release" tab to detach the light for hand-held use while the strap system remains securely in place
- Integrated tail switch with blue LED for easy control and visibility from behind
- Push-button switch with mode memory recalls your last setting









Alkaline	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	250	60	235	60	300	110
CANDELA	2,500	715	215	55	1,900	660
DISTANCE	100m	53m	29m	15m	87m	51m
RUN TIME	6.75 hrs	12 hrs	6.5 hrs	16 hrs	5 hrs	6.75 hrs

USB	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	350	100	325	85	400	160
CANDELA	4,250	1,200	300	75	2,400	960
DISTANCE	130m	69m	35m	17m	98m	62m
RUN TIME	6.25 hrs	12 hrs	7 hrs	12 hrs	5 hrs	7 hrs

Description	Yellow	Black
SL-SideSaddle Hat Light - Includes (3) AAA alkaline batteries and hat mount	61636	61626
SL-SideSaddle USB Hat Light - Includes (1) lithium polymer battery, USB-C cord and hat mount	61637	61627

Size and Weight	Battery
3" (7.6 cm); AA: 3.4 oz (95g) // USB: 3.1 oz (88g)	(3) AAA alkaline batteries; (1) Lithium polymer battery

ENDURO® PRO USB

IPX4

Rechargeable headlamp with spot and flood beams

- Save money over the cost of standard batteries with rechargeability
- Charge indicator LEDs: red=charging; green=charged; charges in 4 hours
- Remembers last mode used; defaults to low beam when powering on
- 45° tilting head



Spot	HIGH	MEDIUM	LOW
LUMENS	200	90	25
CANDELA	2,080	890	250
DISTANCE	91m	60m	32m
RUN TIME	6.25 hrs	19 hrs	48 hrs

Flood	HIGH	MEDIUM	LOW
LUMENS	145	50	15
CANDELA	220	80	30
DISTANCE	30m	18m	11m
RUN TIME	7 hrs	21 hrs	48 hrs

Description	Item #
Enduro Pro USB - Includes USB cord and elastic headstrap - Yellow	61435

Size and Weight	Battery
2.19" (5.56 cm); 3.6 oz (102g)	Lithium polymer

BANDIT® PRO

IPX4

Lightweight, long lasting headlamp

- USB rechargeable with battery life indicator; recharges in 3.5 hours
- Smooth and diffused light for up close tasks
- Snap-in clip adapter attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability



	HIGH	LOW
LUMENS	180	35
RUN TIME	4.5 hrs	21 hrs

Emergency flash - 180 lumens

Description	Item #
Bandit Pro - Includes USB cord - Clam - Yellow	61710
Bandit Pro - Includes USB cord - Clam - Black	61714

Size and Weight	Battery
2.7" (6.85 cm); 1.6 oz (45.4g)	Rechargeable lithium polymer



STREAM™ SERIES

MEGASTREAM® HP USB

IPX7

Powerhouse, high-candela, long range flashlight designed for convenience, it slips effortlessly into your bag

- Power up via the charge port in the body or swap out the removable battery to charge while using a fresh one
- Powered by a SL-B34® rechargeable battery pack; recharges in 5 hours
- Slide the head cover back for USB-C port

	HIGH	MEDIUM	LOW
LUMENS	1,350	470	145
CANDELA	310,000	108,000	32,000
DISTANCE	1,114m	657m	358m
RUN TIME	2 hrs	4 hrs	15 hrs



310,000 cd

Description	Item #
MegaStream HP USB - Includes USB-C cord, holster and SL-B34 battery pack - Black	66211
SL-B34 Battery Pack	22131

Size and Weight	Battery
6.61" (16.8 cm); 9 oz (254g)	(1) SL-B34 battery pack

MEGASTREAM® USB

IPX7

Rechargeable flashlight combining intense brightness with long-distance beam reach and long run time

- Hot-swappable battery capability lets you keep going—charge one battery while using another, so you always have a fully charged backup
- Powered by a SL-B34 rechargeable battery pack; recharges in 5 hours
- Sliding sleeve protects the USB port

	HIGH	MEDIUM	LOW
LUMENS	1,800	500	150
CANDELA	26,000	7,200	2,100
DISTANCE	322m	170m	92m
RUN TIME	2 hrs	3.5 hrs	13 hrs

1800 LUMENS



Description	Item #
MegaStream USB - Includes USB-C cord, lanyard and SL-B34 battery pack - Black	66210
SL-B34 Battery Pack	22131

Size and Weight	Battery
5.3" (13.4 cm); 5.4 oz (152g)	(1) SL-B34 battery pack

MICROSTREAM® USB

IPX4

Rechargeable pocket light

- Discreet light that fits in your pocket
- Clip it to your pocket or hat for hands-free use
- USB rechargeable – metal sleeve protects charge port; slide sleeve forward to reveal charge port



	HIGH	LOW
LUMENS	250	50
CANDELA	1,150	250
DISTANCE	68m	31m
RUN TIME	1.5 hrs	3.5 hrs

Description	Item #
MicroStream USB - Includes lanyard - Clam - Black	66601
MicroStream USB - Includes lanyard - Box - Black	66604
MicroStream USB - Includes lanyard - Clam - Coyote	66608
MicroStream USB - Includes lanyard - Box - Coyote	66609

Size and Weight	Battery
3.87” (9.83 cm); 1.2 oz (34.1g)	Lithium-ion



MICROSTREAM®

IPX4

Ultra-compact personal light

- Clip it to your hat or pocket for hands free use
- Alkaline battery powered
- Push button tail switch



LUMENS	45
CANDELA	420
DISTANCE	41m
RUN TIME	2.25 hrs

Description	Item #
MicroStream - Includes (1) AAA alkaline battery - Black	66318

Size and Weight	Battery
3.6” (9.15 cm); 1.1 oz (31.2g)	(1) AAA alkaline battery

MACROSTREAM® USB

IPX4

High-power, rechargeable flashlight

- Lithium-ion battery charges in 4 hours
- Durable aluminium construction
- Pocket clip attaches to visor



	HIGH	LOW
LUMENS	500	50
CANDELA	2,000	220
DISTANCE	90m	30m
RUN TIME	2 hrs	8 hrs

Description	Item #
MacroStream USB - Includes lanyard - Black	66320

Size and Weight	Battery
4.5” (11.43 cm); 2.2 oz (62.4g)	Lithium-ion



STREAMLIGHT JR.® LED

IPX4

Handheld AA battery-sized flashlight

- Doesn't take up a lot of space in the toolbox
- Push-button switch for momentary or constant on

LUMENS	225
CANDELA	2,700
DISTANCE	104m
RUN TIME Alkaline	6 hrs
RUN TIME Lithium	10 hrs



Description	Item #
Streamlight Jr. LED - Includes (2) AA alkaline batteries and nylon holster - Black	71500
Magnetic Clip Holder	71510
Nylon Holster	71503
Rubber Helmet Strap	99075

Size and Weight	Battery
6.5" (16.51 cm); 4.1 oz (117g)	(2) AA alkaline or lithium

STYLUS PRO®

IPX4

High performance penlight

- Fits easily in your pocket
- Push button tail switch
- Includes nylon holster

LUMENS	100
CANDELA	950
DISTANCE	62m
RUN TIME	8 hrs



Description	Item #
Stylus Pro - Black with White LED - Black	66118

Size and Weight	Battery
5.3" (13.4 cm); 1.64 oz (46.9g)	(2) AAA alkaline batteries

STYLUS®

IPX4

Ultra-slim penlight with a long battery life

- Multi-use penlight
- Removable pocket clip



LUMENS	11
CANDELA	140
DISTANCE	24m
RUN TIME	24 hrs

Description	Item #	COO	TAA
Stylus - Black - White LED	65018	US	YES

Size and Weight	Battery
6.21" (15.17 cm); 1.1 oz (31g)	(3) AAAA alkaline batteries

STYLUS PRO® USB // STYLUS PRO® USB UV

IPX4

Rechargeable penlight, ideal for illuminating hard-to-reach spaces

- Recharges in 2.5 hours
- Powers on in “low” mode; press twice for high mode
- UV Model features a purple sleeve for easy identification

WHITE LED	HIGH	LOW
LUMENS	350	90
CANDELA	2,950	840
DISTANCE	109m	58m
RUN TIME	1.5 hrs	3.5 hrs



400NM UV LED	
OUTPUT	250mW
RUN TIME	2.5 hrs

Description	Item #
Stylus Pro USB - 120V AC with holster - Black	66133
Stylus Pro USB - Includes holster - Black	66134
Stylus Pro USB UV - 120V AC with holster - Black	66148
Stylus Pro USB UV - Includes holster - Black	66149

Size and Weight	Battery
5.95” (15.1 cm); 1.8 oz (51g)	Lithium-ion

STYLUS® ACCESSORIES

DESCRIPTION	ITEM #	STYLUS	STYLUS PRO	STYLUS PRO USB
Nylon Holster	66028		√	
Nylon Holster	66029	√		√
USB Power Adapter	22058			√
40” USB Cord	22070			√
120V AC USB cord	22077			√
120V AC Charge Cord	44909			√
Stylus Pro USB Battery	66143			√
AAAA Battery Pack - 6pk	65030	√		
Glare Guard™	65031	√		
Rubber Sleeve - 6 pk	66155			√
Lanyard with Push-Button Slide	72024	√		


66028, 66029


22058


66143


65031


66155


44909


22070


72024

NANO LIGHT® II

IPX7

Ultra-compact key chain light easily attaches to key rings, zippers, etc.

- Snap hook easily attaches to key rings, zippers, etc.
- Rotating On/Off head switch
- Powered by one easy-to-find AAAA alkaline battery

LUMENS	20
CANDELA	120
DISTANCE	22m
RUN TIME	1 hr



Description	Item #
Nano Light II - Includes (1) AAAA alkaline battery - Black	73020

Size and Weight	Battery
2.2" (5.7 cm); 0.6 oz (18g)	(1) AAAA alkaline

POCKET MATE® USB

IPX4

Small but powerful hands-free light

- Ultra-compact design makes it easy to always carry it with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours

	HIGH	LOW
LUMENS	325	45
CANDELA	1,450	200
DISTANCE	76m	28m
RUN TIME	20 min	1 hr



Description	Item #
Pocket Mate - Includes Micro-USB cord - Silver	73300
Pocket Mate - Includes Micro-USB cord - Red	73301
Pocket Mate - Includes Micro-USB cord - Blue	73302
Pocket Mate - Includes Micro-USB cord - Pink	73303

Size and Weight	Battery
2" (5.1 cm); 0.5 oz (14.2g)	Lithium Polymer







CLIPMATE® USB

IPX4

Multi-function clip light for hands-free use

- Features a white LED and a 620-630 nm red LED
- Built-in USB charge tab
- Recharges by plugging into USB port or optional AC wall adapter

White LED	HIGH	LOW
LUMENS	70	10
CANDELA	500	50
DISTANCE	44m	14m
RUN TIME	3.5 hrs	24 hrs

Red LED	HIGH	LOW
LUMENS	0.5	0.2
CANDELA	9	3
DISTANCE	6m	3m
RUN TIME	16 hrs	65 hrs

Description	Item #
ClipMate USB	61125
ClipMate USB - 120V AC	61126
120V AC Wall Adapter	22058

Size and Weight	Battery
3.2" (8.13 cm); 1.9 oz (53.8g)	Lithium polymer cell





LIGHTS *for a* CAUSE



The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to advance the world's most promising research to eradicate breast cancer in our lifetime. For more information, visit www.bcrfcure.org.



ITEM #	DESCRIPTION
73022	Nano Light II - Pink
88824	Wedge XT - Pink

By purchasing this product, you are helping to make a difference in the rebuilding of the lives of surviving families and affected co-workers of law enforcement officers killed in the line of duty. In addition to rebuilding lives, C.O.P.S. (Concerns of Police Survivors) provides training to law enforcement agencies on survivor victimization issues and educates the public of the need to support the law enforcement profession and its survivors. For more information, visit www.nationalcops.org.



ITEM #	DESCRIPTION
73021	Nano Light II - Blue
88825	Wedge XT - Blue

For every blue Wedge XT sold, Streamlight will donate $3 to Concerns of Police Survivors, Inc. (C.O.P.S.)
For every pink Wedge XT sold, Streamlight will donate $3 to the Breast Cancer Research Foundation® (BCRF)

For every blue Nano Light II sold, we donate $1 to Concerns of Police Survivors, Inc. (C.O.P.S.)
For every pink Nano Light II sold, Streamlight will donate $1 to the Breast Cancer Research Foundation® (BCRF)

STREAMLIGHT
BRILLIANT THINKING®

Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A. 19403-3996

streamlight.com // streamlightgear.com
(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax

DISTRIBUTED BY:



The shape, style and appearance of the generally triangular feature on the head of the Stinger® Series is a trademark of Streamlight, Inc.



The silver band that encircles the head of the TLR® Series is a trademark of Streamlight, Inc.

©2026 Streamlight, Inc. ISO 9001:2015 certified 991166 1/26 Rev G asi/89871

All rights reserved. Trademarks of companies mentioned herein appear for identification purposes only and are the property of their respective companies.